

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
200 Colorado Derby Building
Wichita, Kansas 67202

FORM CP-1
Rev. 6/4/84

WELL PLUGGING APPLICATION FORM
(File One Copy)

API NUMBER _____ (of this well) 6/89
(This must be listed; if no API# was issued, please note drilling completion date.)

EASE OPERATOR Pickrell Drilling Co., Inc. OPERATORS LICENSE NO. 5123

ADDRESS 110 N. Market, #205; Wichita, KS 67202 PHONE # (316) 262-8427

EASE (FARM) Young "K" WELL NO. #2 WELL LOCATION SE SE COUNTY Kingman

SEC. 22 TWP. 29S RGE. 8 (E) or (W) TOTAL DEPTH 4299' PLUG BACK TO 4255'

Check One:

WELL TYPE XX GAS WELL _____ D & A _____ SWD or INJ WELL _____ DOCKET NO. _____

SURFACE CASING SIZE 8 5/8" SET AT 216 CEMENTED WITH 180 SACKS

CASING SIZE 4 1/2" SET AT 4297 1/2 CEMENTED WITH 120 SACKS

PERFORATED AT 4222'-4232'

CONDITION OF WELL: GOOD XX POOR _____ CASING LEAK _____ JUNK IN HOLE _____

OPERATOR'S SUGGESTED METHOD OF PLUGGING THIS WELL Use common cement with 2% gel to plug well as follows: Plug back with sand to 4180'. Use dump bailer to spot 5 sx of cement on top of sand. Cut and start out of hole with casing. Pull btm. of casing to 1370 ft. and spot 35 sx (140 ft. theor.) of cement. Pull btm. of casing to 850 ft. and spot 35 sx (140 ft. theor.) of cement. Finish pulling and laying down casing. Plug surface by tying into 8 5/8" and pumping 10 bbls. high gel-water, 50 s:

(If additional space is needed use back of form)(cont. on back of form)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? Yes IS ACO-1 FILED? Attached
(If not, explain)

DATE AND HOUR PLUGGING IS DESIRED TO BEGIN July 11, 1989

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et seq AND THE REGLES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

STATE CORPORATION COMMISSION

NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS: JUN 27 1989

Don Aumiller PHONE # (316) 532-3579 CONSERVATION DIVISION
Wichita, Kansas

ADDRESS Box 290; Kingman, Kansas 67068

PLUGGING CONTRACTOR Clark Corporation LICENSE NO. 5105 6/89

ADDRESS Box 187; Medicine Lodge, KS 67104 PHONE # (316) 886-5665

PAYMENT WILL BE GUARANTEED BY OPERATOR OR AGENT SIGNED: Jack Gurley

(Operator or Agent)
Jack Gurley, Engineer


DATE: June 23, 1989

2

BAKER SERVICE TOOLS - TALLY PAD

New Completion Workover

Oil Company _____ Well No. 2 Field Belmont Center Lease Young K
 Company Man _____ Date Drilled May 1975 County Kingman State Kansas

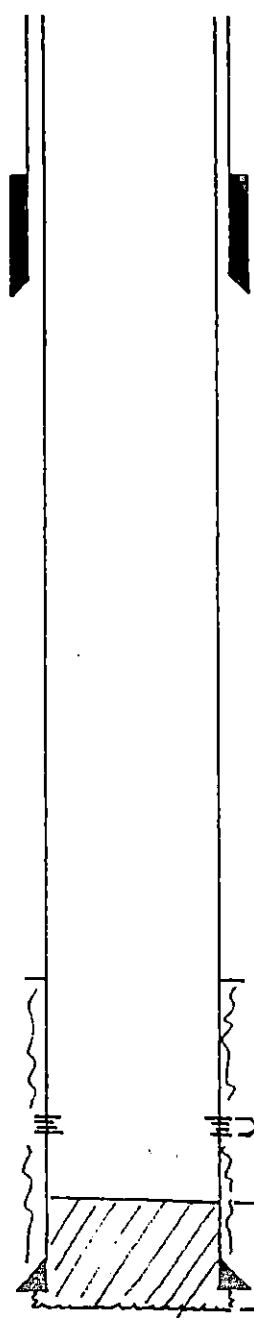

— 216' Base 8 5/8" w/ 180 Sx

Estimated Shallow Fmtn. Tops (Base on Type Log)

Top Hutchinson Salt	920
Base Hutchinson Salt	1270
Top Chase Group	1485
Heebner	3231 (from well log)

— 3790 Est'd T.O.C. (Based on 80% Theor. Fillup)

— 4222-4232 (Miss Perfs)

— 4255 PBD (Loggers)

— 4297 1/2' Base 4 1/2" 10.5# Csg. w/ 120 Sx Common

— 4299 RTD

REMARKS:

Suggested Plugging Procedure -
 Plug back w/ sand to 4180. Use dump bailer to spot
 5sx cement on sand. Cut and start 00H w/ csg. with
 bit. of csg. @ 1370 spot 3.5sx cement. Pull bit.
 of csg. to 850 and spot 3.5sx. P00H w/ csg.
 T/c into 8 5/8" and pump 10 bbls. mud, 50 sx
 cement, 8 5/8 plug, 3.5sx cement, 8 5/8 plug, 1.5sx
 cement. Check depth of plug and depth covered.

RECEIVED
 STATE CO. DIVISION
 JUN 27 1989
 CONSERVATION DIVISION
 Wichita, Kansas

Electric log run (show type log and depth covered)

State of Kansas



Kansas Corporation Commission

MIKE HAYDEN
ARTHUR H. HENLEY
MICHAEL KOWALEWSKI
MARGAREE WRIGHT
WALTER MCCOINHELL
FRANK A. CARO, JR.

GOVERNOR
CHAIRMAN
COMMISSIONER
COMMISSIONER
EXECUTIVE DIRECTOR
GENERAL COUNSEL

CONSERVATION DIVISION
SHARI FEIST ALBRECHT, DIRECTOR
200 Colorado Dorby Bldg.
202 W. 1st Street
Wichita, KS 67202-1286
(316) 263-3238

THIS NOTICE

SEP 27 1989

EXPIRES

June 27, 1989

NOTICE OF RECEIPT OF
WELL PLUGGING APPLICATION

Pickrell Drilling Company, Inc.
110 N. Market, Ste. 205
Wichita, KS 67202

Young "K" #2
SE SE
Sec. 22-29S-08W
Kingman County

Gentlemen:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging. Please contact the district office to review your proposed plugging method at least five (5) days before plugging the well.

It has recently come to my attention that the form CP-1 has been filed by operators other than the owner or operator of the well and without the consent of the owner or operator. The Conservation Division's review of form-CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well. The CP-1 is simply reviewed to determine compliance with plugging rules and regulations.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely,

Shari Feist Albrecht

Shari Feist Albrecht
Director

District: #2 202 W. First, Ste. 300
Wichita, KS 67202
(316) 263-8809