

COUNTY: Stevens, Kansas

COMPANY: J. M. Huber Corporation

15-189-00586-00-00

TITLE OF WELL: Dunne-Hoffman #3

LOCATION: Center of SE¹/₄ of Section 9, Twp. 34, Rge. 37, Stevens County, Kansas.

- CASING -

COMMENCED: 3/15/42

COMPLETED: 4/29/42

TOTAL DEPTH: 2898'

ELEVATION: 3162'

10-5/16" Armo slip joint surface casing
set @ 611' cmtd. with 80 sacks - 3 ga.
7" set @ 2650' cmtd with 125 sacks -
20# Republic Electric Weld.

5 1/2" 15# seamless liner
set at 2898'

FORMATION	DEPTH
Surface Sand	40
Sand & Caliche	261
Caliche, Sand & Yel. Clay	570
Redbed	980
Gyp	1045
Redbed & sand	1282
Redrock & Gyp shells	1527
Sandy Shale & Redrock	1720
Anhydrite	1780
Dolomite	1820
Sand & shale	2290
Dolomite & Anhydrite	2640
Sand & Dolomite	2658
Anhydrite & red shale	2670
Sand & Dolomite	2675
Dolomite	2705
Red Shale	2710
Dolomite	2735
Red shale	2740
Dolomite	2750
Red Sand	2760
Dolomite	2795
Sand & Red shale	2815
Limestone	2863
Sand	2875
Sandy Lime	2898


SAND RECORD

First Show gas	2660
Inc.	2685
Inc.	2710
Inc.	2745-50
Inc.	2777-95
Inc.	2820-60
7 Million	

2 MM

Rotary to 2658'

5-27-42

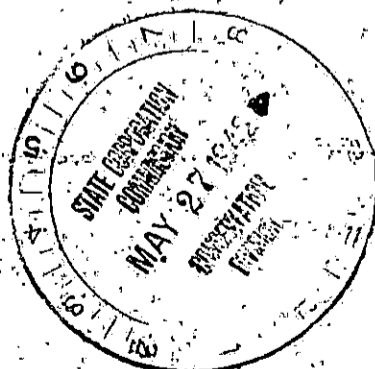

AFFIDAVIT

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Glen M. Dunne, of lawful age, being first duly sworn upon his oath, deposes and says:

That he is part owner in three gas wells located in Sections Five (5), Seven (7), and Eight (8) of Township Thirty-four South (34S), Range Thirty-seven West (37W), Stevens County, Kansas, in the Hugoton Gas Field; that said wells were drilled in the months of March and April, 1942; that at various times after the completion of the aforesaid wells the said Glen M. Dunne and his associates tendered the production from said wells to various purchasers of natural gas within the Hugoton Field, offering to lay the necessary gathering lines from the wells to the facilities of the purchasers and to sell gas at the prevailing price in the field; but that all such tenderships were refused until in the month of August, 1943, the Panhandle Eastern Pipe Line Company agreed to purchase the production from the aforesaid three wells; that said Panhandle Eastern Pipe Line Company did not connect said wells and commence taking gas therefrom until May, 1944; so that the aforesaid three wells were unconnected as of April 1, 1944.

Further affiant saith not.


Signature of Affiant

Subscribed and sworn to before me this 6th day of November, 1946.


Notary Public

My commission expires Nov 5, 1947.