

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-067-21109-00-00
Spot: W2SWNW Sec/Twnshp/Rge: 32-29S-38W
3300 feet from S Section Line, 4926 feet from E Section Line
Lease/Unit Name: LORA HICKOK Well Number: 1
County: GRANT Total Vertical Depth: 5800 feet

Operator License No.: 5952 Production Casing Size: 5.5 feet: 5800 WITH 700 SX CMT
Op Name: BP AMERICA PRODUCTION COMPANY Surface Casing Size: 8.625 feet: 1800 WITH 900 SX CMT
Address: 2225 WEST OKLAHOMA AVENUE
ULYSSES, KS 67880 \$188⁵⁰

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 05/09/2003 3:30 PM
Plug Co. License No.: 99979 Plug Co. Name: OILWELL CEMENTERS, INC.
Proposal Rcvd. from: LARRY SMITH Company: OILWELL CEMENTERS, INC. Phone: (918) 223-6731

Proposed Plugging Method: PUMP 50# FLOCELE WITH 50 SX CMT. LOAD HOLE WITH MUD & PRESSURE UP. PERFORATE AT 800'.
PUMP 215 SX CMT TO SURFACE.

Plugging Proposal Received By: JIM HOLLAND Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 05/13/2003 10:00 AM KCC Agent: JIM HOLLAND

Actual Plugging Report:


PERFS AT 5653-63'. 05/0903: PUMP 50# FLOCELE WITH 50 SX CMT. LOAD 5 1/2" WITH MUD. PRESSURE TO 500 PSIG & SHUT IN. 05/12/03: RUN CMT BOND LOG. FL @ 60'. TOC @ 900'. PERFORATE AT 800'. PUMP FLUID. GOOD CIRCULATION. SDON. 05/13/03: PUMP 215 SX CMT INSIDE 5 1/2" & 5 1/2" X 8 5/8" ANNULUS FROM 800' TO SURFACE.

RECEIVED
AUG 05 2003
KCC WICHITA

Remarks: USED CLASS A CMT WITH 6% GEL BY OILWELL CEMENTERS. NO CASING RECOVERED.

Plugged through: CSG

District: 01

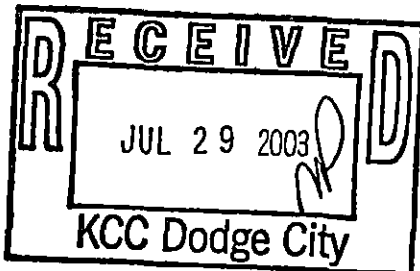

Signed

Jim Holland PERTT
(TECHNICIAN)

INVOICED
DATE 8-5-03
INV. NO. 2004060353

Form CP-2/3