


STATE OF KANSAS CORPORATION COMMISSION

WELL PLUGGING RECORD

Give Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission 800 Biting Building Wichita, Kansas

Kiowa County, Sec. 13 Twp. 29S Rge. (E) 19(W) Location as "NE/CNW/SW" or footage from lines C NW NW SE Lease Owner Gulf Oil Corporation Lease Name F. H. Jarkin Well No. 1 Office Address Box 661, Tulsa, Oklahoma Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole Date well completed 12-15 1955 Application for plugging filed 12-16 1955 Application for plugging approved 12-19 1955 Plugging commenced 12-16 1955 Plugging completed 12-16 1955 Reason for abandonment of well or producing formation Dry Hole

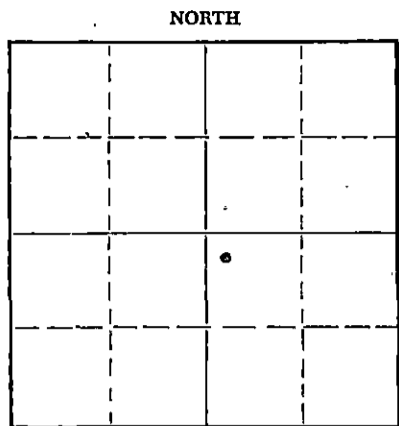

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production - - 19 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rivas Producing formation - Depth to top - Bottom - Total Depth of Well 5211 Feet Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. Row 1: SIZE 8-5/8", PUT IN 651', PULLED OUT - 0'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded hole to 350' and set wood plug and ran 1 sack of fibertex and 35 sacks Victor Regular Portland cement. Filled with mud to 35' of top, set wood plug and capped with 1 sack of fibertex and 15 sacks cement same as above filling hole into cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Falcon Seaboard Drilling Co. Address East Mezzanine, Stanolind Bldg., Tulsa 3, Oklahoma

STATE OF Kansas COUNTY OF Barton, ss. W. H. Duley (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. H. Duley Box 225, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 20TH day of December, 1955

My commission expires October 26, 1959

Notary Public.

PLUGGING FILE SEC-13T-29R 19W BOOK PAGE 25 LINE 5

EO 27 1955 12-27-55 CONSERVATION DIVISION Wichita, Kansas

WELL LOG

COMPANY - Gulf Oil Corporation

Sec. 13-298-19W

FARM - F. H. Larkin No. 1

Loc. NW NW SE

TOTAL DEPTH - 5211'

County - Kiowa

COMM. 11-29-55. COMP. 12-15-55.

CONTRACTOR - Falcon Seaboard Drilling Company

Elevation

CASING

8-5/8" - 660.90'

D.F. -
Gr. -

DRILLER'S LOG

Clay & Sand	0	662
Red Bed, Lime & Shale	662	1262
Shale & Lime	1262	2535
Lime	263	2918
Lime & Shale Streaks	2919	3003
Lime & Shale	3003	3632
Lime	3632	3713
Lime & Shale	3713	4456
Lime	4456	4606
Lime & Shale	4606	4670
Lime	4670	4754
Lime & Shale	4754	4841
Lime	4841	4861
Lime & Shale	4861	4976
Lime	4976	5023
Lime & Shale Streaks	5023	5052
Lime & Shale	5052	5182
Chert, Lime & Shale	5182	5211
Total Depth	5211	

3

RECEIVED
STATE CORPORATION COMMISSION
JAN 28 1955 1-28-56
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
WELL SEC 13 T 29 R 19W
BOOK PAGE 25 LINE 5