

STATE OF KANSAS
STATE CORPORATION COMMISSION

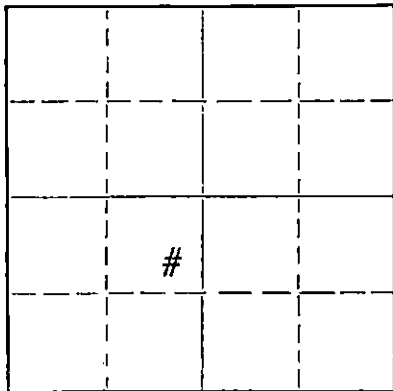
Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

6/1/65 Corrected 20-33-1W

NORTH



Locate well correctly on above
Section Plat

Sumner County. Sec. 20 Twp. 30 Rge. 1 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SE/NE/SW
Lease Owner Walters Drilling Co.
Lease Name Newlin Well No. 1
Office Address 510 Orpheum
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced May 18, 1965
Plugging completed May 20, 1965
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Howard Hess
Producing formation Depth to top Bottom Total Depth of Well 4282' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	125'	None
				5 1/2	4277'	3001'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged back with sand from 4282' to 4265'. Mixed and dumped 4 sx. of cement from 4265' to 4207'. Pulled casing. Mixed and pumped in 15 sx. of gel mud. Put in plug, and mixed and pumped in 100 sx. of cement from 300' to base of the cellar.

RECEIVED
STATE CORPORATION COMMISSION

JUN 1 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ace Pipe Pulling Co.
Address Box 304 Great Bend, Ks.

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Robert F. Walters

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

510 Orpheum Building, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of May, 19 65

My commission expires October 4, 1967

Juanita M. Green
Juanita M. Green

Notary Public.

15-191-11195-0000

20-38-1W

DRILLER'S LOG

OPERATOR: WALTERS DRILLING CO., et al
510 Orpheum Building
Wichita 2, Kansas

WELL NAME: #1 NEWLIN

CONTRACTOR: WALTERS DRILLING CO.
510 Orpheum Building
Wichita 2, Kansas

LOCATION: SE NE SW
Sec. 20-33S-1W
Sumner Co, Kansas

CASING: 8-5/8" @ 251.5' (165 sx cmt)
4-1/2" @ 4277' (200 sx cmt)

COMMENCED: 7-1-60
COMPLETED: 7-16-60

ELEVATION: 1203' KB

TOTAL DEPTH: 4282'

PRODUCTION: OIL - Simpson

FORMATION RECORD

Depths shown indicate bottom of formations encountered.


Soil, Shale & Shells	255
Shale & Shells	500
Shale & Lime	2865
Sand & Shale	2945
Shale & Lime	3298
Sand & Shale	3290
Lime	3448
Lime & Shale	3867
Mississippian Lime	3931
Lime & Chert	3952
Lime	4171
Lime & Shale	4236
Shale & Sand	4282
R.T.D.	4282'

RECEIVED
STATE CORPORATION COMMISSION
JUN 2 1960
CONSERVATION DIVISION
Wichita, Kansas


CERTIFICATION

STATE OF KANSAS)
COUNTY OF SEDGWICK) SS:

I, Robert F. Walters, of WALTERS DRILLING CO., hereby state upon oath that the foregoing is a true and correct copy of the Driller's Log of the Walters Drilling Co., #1 Newlin well.


Robert F. Walters

Subscribed and sworn to before me on this the 18th day of July, 1960.


Patricia M. Edwards, Notary Public

My commission expires: August 11th, 1962.