

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Morton County, Sec. 18 Twp. 32 Rge. (E) 43 (W)

Location as "NE/CNW/SW" or footage from lines SW SW NE
Lease Owner Colorado Oil & Gas Corporation
Lease Name Saunders Well No. 1-18
Office Address P.O. Box 158, Liberal, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed 2-12-55 19
Application for plugging filed 10-10-64 19
Application for plugging approved 11-12-64 19
Plugging commenced 11-12-64 19
Plugging completed 11-14-64 19
Reason for abandonment of well or producing formation Non commercial

NORTH

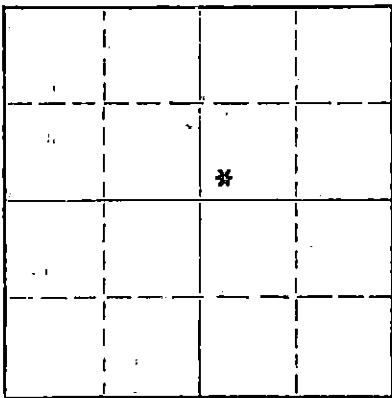

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 7-23-64 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott, Sublette, Kansas
Producing formation Topeka Depth to top 3131 Bottom 3153 Total Depth of Well 3248 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Topeka	Gas	3131	3153	8-5/8"	600'	None
				5-1/2"	3380'	1107.87

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mix 20 sacks cement run on bottom to plug perforations at 3131 to 3153'. Run cement plug 3050' to 3030'. Shot pipe off at 1123'. Filled hole with heavy mud. Run 35 sacks cement 650' to 550' and a 15 sack cement plug from 45' to 3'. Cut 8-5/8" Casing off at 3' below ground level, welded cap on end of casing.

RECEIVED
STATE CORPORATION COMMISSION

NOV 24 1964

11-24-1964
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sargents Casing Pulling Service
Address P.O. Box 506, Liberal, Kansas

STATE OF Kansas, COUNTY OF Seward, ss.
L.H. Walters (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *L.H. Walters*

(Address)


SUBSCRIBED AND SWORN to before me this 23rd day of November, 1964

William B. Claunch
Notary Public.

My commission expires 11-1-66

Orig: Kansas Corp. Comm.
cc: Santa Fe Land Improvement
A.J. Smith
Colorado Interstate
R.G. Yarbrough

15-129-10067-0000

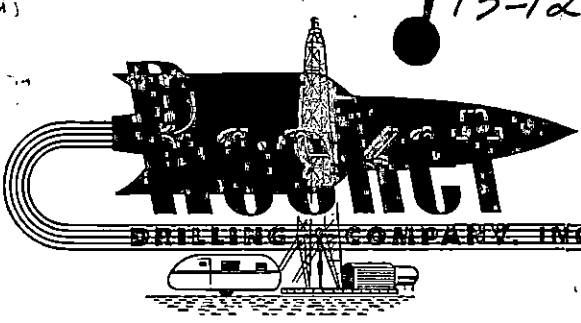

DRILLING COMPANY, INC. Phone 3-1279 352 N. BROADWAY WICHITA, KANSAS

Colorado Oil & Gas Corp.
#1-18 Saunders
SW SW NE Section 18-32-43W
Morton County, Kansas

Colorado Oil & Gas Corp.
311 Equitable Building
Denver, Colorado

RECEIVED
STATE CORPORATION COMMISSION

NOV 12 1964

Spudded: October 11, 1954
Rotary Completed: October 27, 1954
Contractor: Rocket Drilling Company, Inc.

CONSERVATION DIVISION
Wichita, Kansas

CASING RECORD

608° 8-5/8" O.D. 24# Seamless Casing Cemented with 300 Sacks Cement.


DRILLERS LOG

Sand & Clay	0 to 340	Red Bed, Shale, Lime & Shells	1835
Shale	360	Shale, Shells & Lime Streaks	2090
Sand	380	Lime & Shale	2370
Shale & Red Bed	610	Broken Lime, Shale & Sand	2465
Red Bed & Sand	680	Lime & Shale	2570
Sand	720	Broken Lime & Shale	2595
Red Bed & Sand	915	Lime & Shale	2620
Gypsum	945	Lime, Shale & Sand	2760
Red Bed & Shale	1035	Lime	2920
Anhydrite Streaks	1055	Lime & Shale	3035
Red Bed, Shale, Shells & Sand	1290	Lime	3280
Shale, Shells & Sand	1450	Shale & Lime	3370
Shale & Anhydrite Streaks	1465	Lime	3395 TD
Anhydrite	1490		


STATE OF KANSAS)
) SS:
COUNTY OF SEDGWICK)

I hereby certify that to the best of my knowledge and belief, the foregoing log is true and correct.

ROCKET DRILLING COMPANY, INC.


B. W. Burks

Subscribed and sworn to before me, a Notary Public, in and for the state and county aforesaid, this 8th day of November, 1954.


Notary Public

My Commission Expires: March 5, 1958

NOV 9 1954

RECEIVED

NOV 9 1954

NOV 9 1954

NOV 9 1954

NOV 9 1954

Colorado Oil & Gas Co.
Production Department
RECEIVED
NOV 9 1954
Liberal, Kansas

NOV 9 1954