

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Kiowa County, Sec. 5 Twp. 29 Rge. 20 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NW NE

Lease Owner Rains & Williamson Oil Company

Lease Name Sayre Well No. 1

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 1-27-66 19

Plugging completed 2-8-66 19

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

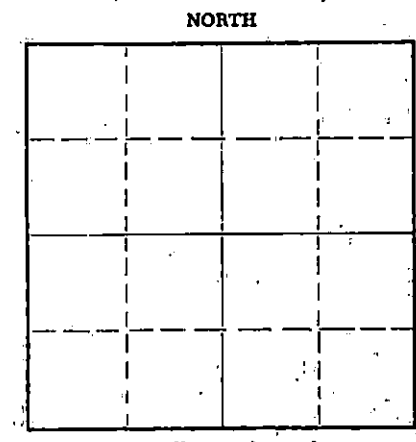

Locate well correctly on above Section Flat

Name of Conservation Agent who supervised plugging of this well Archie Elving

Producing formation Depth to top Bottom Total Depth of Well 5265 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	352'	None
				4-1/2"	5265'	3632'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded hole from 5265' to 5060' and dumped 3 sacks of cement @ 5060' with dump bailer. Pulled 4 1/2" casing, Set rock bridge @ 300' and dumped 25 sacks of cement on bridge. Mudded hole to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

FEB 11 1966

PLUGGING COMPLETE.

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE ss. Noel J. Knight

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of February, 1966

My commission expires May 20, 1968 Notary Public.

ROTARY DRILLING LOG

OPERATOR: Rains & Williamson Oil Co.
 #1 Sayre
 NW NE Sec. 5-29S-20W
 Kiowa County, Kansas

Commenced: 11/23/65
 Rotary released: 12/12/65
 Remarks: Set 352.59' of 8-5/8"
 surface casing w 225 sx.

Set 4½" casing 7½' off
 bottom w 150 sx salt sat.
 cement.

FORMATIONS

Surface Clay	105°
Sand	180°
Shale	380°
Sand	400°
Shale	570°
Sand & Red Bed	585°
Shale	1345°
Shale & Shells	1526°
Anhydrite	1590°
Shale	2350°
Shale & Lime	2445°
Lime	2775°
Lime & Shale Stk's	2872°
Lime	3055°
Lime & Shale	3415°
Shale & Chalk w/ lime stk	3560°
Shale & Lime	3905°
Lime & Shale	4130°
Lime	4200°
Lime & Shale	4262°
Lime	4405°
Lime & Shale	4448°
Lime	4553°
Lime & Shale	4590°
Lime	4705°
Lime & Shale	4830°
Lime	4845°
Lime & Shale	4910°
Lime	5265°
Rotary Total Depth	5265°

RECEIVED
 STATE CORPORATION COMMISSION

JAN 21 1966

CONSERVATION DIVISION
 WICHITA, KANSAS

We certify the above log is true and
 correct to the best of our knowledge
 and belief.

RAINS & WILLIAMSON OIL CO.

Wilson Rains
 Wilson Rains, Partner

Subscribed and sworn to before me, a Notary Public in and for the State
 of Kansas, County of Sedgwick, this 14th day of December, 1965.

My Commission Expires:
 July 25, 1968

Judith Caughlin
 Judith Caughlin, Notary Public