


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Stevens County, Sec. 13 Twp. 32 Rge. 37 XE/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
1250' FSU & 1250' FWL

Lease Owner Mobil Oil Corp.
Lease Name Wilson Well No. 1-2
Office Address 200 W. 4th, Hugoton, Kansas 67951
Character of Well (Completed as Oil, Gas or Dry Hole) _____

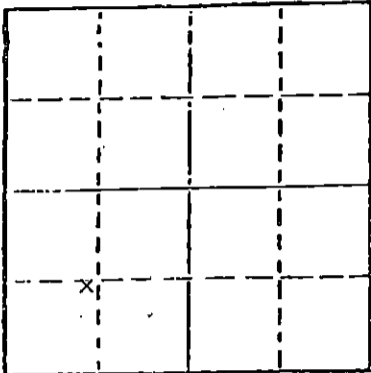

Locate well correctly on above
Section Plot

Dry
Date Well completed 12-23 1977
Application for plugging filed 8-3 1979
Application for plugging approved 8-6 1979
Plugging commenced 8-21 1979
Plugging completed 8-22 1979

Reason for abandonment of well or producing formation
No Production
If a producing well is abandoned, date of last production
_____ 19__

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Thomas
Producing formation Council Grove Depth to top 2940' Bottom 3000' Total Depth of Well 3100'
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface				85/8"	600'	0'
Production				5 1/2"	3100'	714'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Pumped 2 sacks hulls & 20 sacks cement on bottom- Pressured to 750 lbs.
Displaced to 650'
Pumped 35 sacks cement 650' to 550'
Displaced to 40'
Put bridge & 10 sacks cement 40' to 0'.



(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Midwest Casing Pulling
Box F, Sublette, Kansas 67877 Kansas Permit # 776

STATE OF KANSAS COUNTY OF HASKELL, ss.
I Edgar J. Eves (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Edgar J. Eves
Box F, Sublette, Kansas 67877
(Address)

SUBSCRIBED AND SWORN TO before me this 23 rd day of August, 1979

Sandra L. Eves
Notary Public.

My commission expires 12-6-80

