

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Kingman County, Sec 25 Twp. 29S Rge. 7W (E) (W)

Location as "NE/CNW/SW" or footage from lines SE NE SW  
Lease Owner KATHOL PETROLEUM, INC.  
Lease Name Millard Well No. 1  
Office Address 900 Sutton Place, Wichita, Ks. 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed September 3, 1967  
Application for plugging filed January 25, 1973  
Application for plugging approved 19  
Plugging commenced January 30, 1973  
Plugging completed February 2, 1973  
Reason for abandonment of well or producing formation Depleted

NORTH

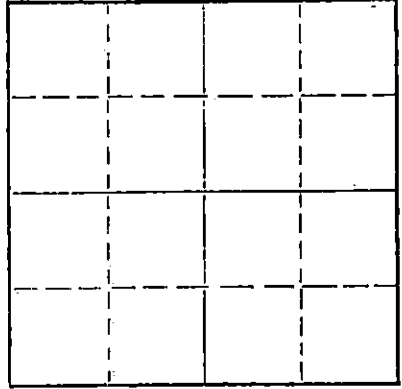

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production April 1972  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well G. Russell Biberstein  
Producing formation Depth to top Bottom Total Depth of Well 4130 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	250'	None
				5-1/2"	4129'	3120'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Push plug to 3700', sand back to 3675'  
Dumped 5 sacks cement & heavy mud to  
300'. Rock bridge 300' to 280', 4 yards  
ready mix concrete on bridge.

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 14 1973  
CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor Ralph Comstock Pipe Pullers, Inc.  
Address 320 N. Park, Stafford, Ks.

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Homer J. Catt (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Homer J. Catt*  
900 Sutton Place, Wichita, Ks.  
(Address)

Subscribed and sworn to before me this 13th day of February, 1973

My commission expires June 4, 1975  
Virginia Cogan Notary Public.

DRILLERS LOG

KATHOL PETROLEUM, INC.  
#1 MILLARD  
SE NE SW Sec. 25-29S-7W  
KINGMAN COUNTY, KANSAS

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 9 - 1972  
CONSERVATION DIVISION  
Wichita, Kansas

Commenced: 8/27/67  
Completed: 9/3/67  
Elevation: 1509 KB

FROM	TO		REMARKS
0	80	Shale-Sand	Set 250' of 8 5/8" surf.
80	250	Red bed	casing with 200 sacks cement
250	335	Red bed & Shale	1% Gel-Sunset Hot
335	1045	Shale-Red Bed	
1045	1200	Lime-Shale	<u>TOPS (Log)</u>
1200	1525	Lime-Shale	Heebner 3042 (-1533)
1525	1795	Lime & Shale	Toronto 3052 (-1543)
1795	1995	Lime-Shale	Douglas Sand 3170 (-1661)
1995	2345	Shale & Shells	Lansing 3278 (1769)
2345	2585	Shale & Lime	Mississippian 4096 (-2587)
2585	2890	Shale-Lime	R.T.D. 4131 (-2622)
2890	3208	Shale & Lime-Sand	R.T.D. (Drlg) 4130 (-2621)
3208	3370	Shale-Sand-Lime	
3370	3525	Lime-Shale	
3525	3640	Lime	
3640	3715	Lime	
3715	3795	Lime	
3795	3920	Lime	
3920	4005	Lime	
4005	4060	Shale & Lime	
4060	4096	Shale & Lime	
4096	4118	Lime & Chert	
4118	4130	Chert	
	4130	Total Depth	

I certify to the best of my knowledge and belief, the above represents a true and accurate driller's log record of the captioned well.

Don G. Calvin  
Don G. Calvin

STATE OF KANSAS )  
                          )SS  
COUNTY OF SEDGWICK)

Subscribed and sworn to before me this 11th day of September, 1967.

Eugene A. Irsik  
Eugene A. Irsik, Notary Public

My Commission Expired: April 8th 1971.