

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217

Kingman County, Sec. 29 Twp. 29S. Rge. ~~X28~~ 6 (W)
Location as "NE/CNW/SW" or footage from lines C NW SW
Lease Owner Graves Drilling Co., Inc.
Lesse Name Sample Well No. 1
Office Address 910 Union Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 5 19 76
Application for plugging filed May 5 19 76
Application for plugging approved May 5 19 76
Plugging commenced May 5 19 76
Plugging completed May 5 19 76
Reason for abandonment of well or producing formation

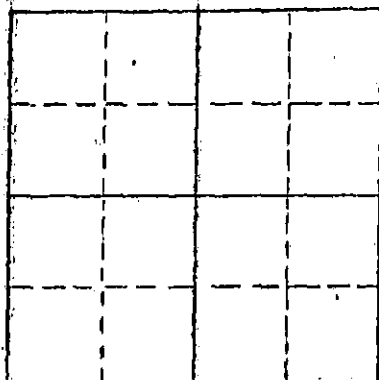

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein, Attica, Kansas
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	210'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 200 feet. Pumped 35 sacks of cement through drill pipe with pump truck. Pushed plug and 1/2 sack hulls to 40' and pumped 15 sacks cement through drill pipe with pump truck to base of well cellar. Plugged rat hole with 2 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

MAY 14 1976 5-14-76

CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor, Graves Drilling Co., Inc.
Address 910 Union Center, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK 58.
Betty Brandt (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Betty Brandt

910 Union Center, Wichita, Kansas 67202 (Address)

Subscribed and Sworn to before me this 13th day of May 19 76

Courtney M. Graves
Courtney M. Graves Notary Public.

My commission expires February 2, 1980



ROTARY DRILLERS' LOG

OPERATOR: Graves Drilling Co., Inc.
910 Union Center
Wichita, Kansas 67202

DRILLING COMMENCED: 27 April 1976

CONTRACTOR: Graves Drilling Co., Inc.
910 Union Center
Wichita, Kansas 67202

DRILLING COMPLETED: 4 May 1976

CASING RECORD: 5 Jts. 210' of used 8-5/8"
cemented with 225 sacks

LOCATION: Sample No. 1
C NW SW
Section 29-29S-6W
Kingman County, Kansas

0 - 30 Sand
 30 - 412 Red Rock
 412 - 1100 Shale & sand
 1100 - 2786 Shale & shells
 2786 - 2970 Shale
 2970 - 3225 Shale & shells
 3225 - 3365 Shale
 3365 - 3460 Shale with lime
 3460 - 4190 Lime
 4190 Rotary Total Depth

RECEIVED
STATE CORPORATION COMMISSION

MAY 14 1976

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

CONSERVATION DIVISION
Wichita, Kansas

GRAVES DRILLING CO., INC.

By Betty Brandt
Secretary-Treasurer

STATE OF KANSAS)
) SS:
SEDGWICK COUNTY)

Subscribed and sworn to before me, a Notary Public, this 11th day of May, 1976

My commission expires: 2 February 1980

Courtney M. Graves
Notary Public
Courtney M. Graves

