


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

B

NORTH

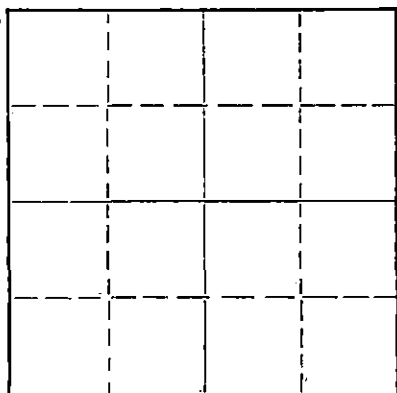

Locate well correctly on above
Section Plat

Sumner County. Sec. 8 Twp. 35S Rge. 3 (E)W (W)
Location as "NE/CNW&SW&" or footage from lines SE/4
Lease Owner Sunray Mid-Continent Oil Co.
Lease Name Loyd Seltzer #1 Well No. 1
Office Address Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed September 19, 19 59
Application for plugging filed December 7, 19 59
Application for plugging approved December 8, 19 59
Plugging commenced 12-21-59 19
Plugging completed 12-24-59 19
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 7-18- 1959
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Lee Guthrie
Producing formation Simpson Depth to top 4866 Bottom 4874 Total Depth of Well 4874 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	616'	none
				5-1/2"	4860'	4119'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked the hole to 4850' and found it open.
Bottom had previously been plugged off with
11 sacks of cement. Pulled 5 1/2" casing,
cleared hole and bailed from 70' to 220',
set rock bridge to 210' and dumped 20 sacks
of cement. Mudded the hole to 35', set rock
bridge to 30' and dumped 10 sacks of cement
to base of cellar.

STATE CORPORATION COMMISSION

JAN 5 1960

PLUGGING COMPLETED

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Knight Casing Pulling Co.
Address Chase, Kansas

STATE OF KANSAS COUNTY OF RICE, ss.
I, Noel J. Knight (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God,

(Signature) Noel Knight
Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 30th day of December, 19 59

Thomas V. Duggan

Notary Public.

My commission expires 9-27-62

