

15-191-10228-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

n Sumner County. Sec. 4 Twp. 35 Rge. 3E (E) (W)

Location as "NE/CNW/SW" or footage from lines SE NW SE

Lease Owner Texaco, Inc.

Lease Name Showalter #2 Well No. 2

Office Address Oklahoma City, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 11/12/70 19

Plugging completed 11/18/70 19

Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

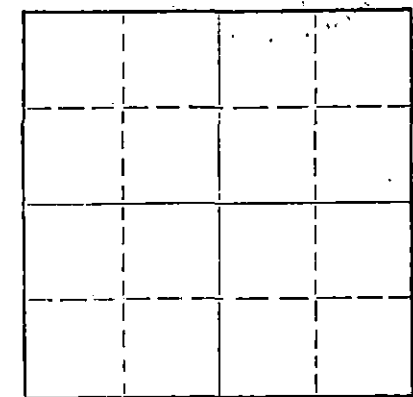

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Hess

Producing formation Depth to top Bottom Total Depth of Well 4882 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4	602	none
				7"	4881	2755'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded hole to 4780', set 6 sacks of cement. Shot pipe at 3036', 2940', 2846', 2755', pulled 89 joints. Bailed hole to 300', set rock bridge and ran 35 sacks of cement. Mudded to 25', ran 10 sacks of cement.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
NOV 30 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.

Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss. NOEL J. KNIGHT

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 24th day of November, 1970

Margaret Melcher
Notary Public.

My commission expires 2/15/71

15-191-10228-0000

4-35-3W

LOG OF WELL

SHEET No. 2

District Kansas		Owner The Texas Co.		Farm J.E. Showalter		Well No. 2
FORMATION	AMOUNT	COLOR	HARD OR SOFT	DEPTH CORES TAKEN	REMARKS	
Sandy Red Bed	70				<u>CASING RECORD:</u> 10-3/4" casing set at 602' with 350 sacks cement. 7" casing set at 4882' with 500 sacks cement, 250 sacks through DV Tool, 250 sacks around shoe. <u>ELEVATIONS:</u> 1126 DF. 1128 KB 1119 GL. <u>TOPS:</u> Stalnaker ----- 3142 Layton ----- 3611 Kansas City --- 3653 Mississippian - 4334 Kinderhook ---- 4695 Misener ----- 4750 Viola ----- 4765 Simpson ----- 4779 Simpson Sd. --- 4802	
Sandy Shale	330	260				
Shale & Shells	370	40				
Salt, Shale & Shells	602	232				
Shale & Lime	965	363				
Shale, & Lime Shells	1120	155				
Lime & Shale	1405	285				
Shale & Lime Shells	1640	235		Top of cement 3110'		
Shale & Lime	2200	560				
Shale & Shells	2210	10				
Shale & Lime	2456	246				
Lime	2471	15				
Shale & Lime	2768	297				
Lime	2778	10				
Shale & Lime	3255	477				
Sand, Shale & Shells	3275	18				
Sand & Shale	3363	90				
Shale	3456	93				
Shale & Lime	3578	122				
Shale	3634	56				
Soft Sand	3652	18				
Hard Sand	3671	19				
Lime	3686	15				
Lime & Shale	3946	260				
Lime	3976	30				
Shale & Lime	4373	397				
Chat	4384	11				
Lime	4654	270		Lost circ. @ 4594'		
Lime & Shale	4686	32		recovered in 2 hrs.		
Lime	4691	5				
Shale & Lime	4709	18				
Shale	4747	38				
Sand & Shale	4753	6				
Shale & Lime	4765	12				
Shale	4766	1				
Coring-no formation shown	4814	48				
Sand & Lime	4827	13				
Coring-no formation shown	4882	55				
Total Depth	4882					
PBTD	4805					

REMARKS:

- 9-25-51 Took Core #1 from 4766-67, recovered 1', core barrel jammed.
- 9-26-51 Took Core #2 from 4767-4802, recovered 35'.
- 9-27-51 Took Core #3 from 4802-08, recovered 6'.
- 9-28-51 Took Core #4 from 4808-14, recovered 5'.

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 5 1970
 CONSERVATION DIVISION
 Wichita, Kansas