

15-095-01541-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

OR FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

NORTH



Locate well correctly on above
Section Plat

Kingman County. Sec. 13 Twp. 29 Rge. 10 (E) (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. NEC
Lease Owner. B & R Drilling Co.
Lease Name. Theis Well No. 1
Office Address. Russell, Ks.
Character of Well (completed as Oil, Gas or Dry Hole). Dry hole
Date well completed. 5/13 19. 45
Application for plugging filed. 5/13 19. 45
Application for plugging approved. 5/13 19. 45
Plugging commenced. 5/13 19. 45
Plugging completed. 5/13 19. 45
Reason for abandonment of well or producing formation. Dry Hole

If a producing well is abandoned, date of last production. 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well. Kerr
Producing formation. Depth to top. Bottom. Total Depth of Well. 4735 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	352'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud-set wooden plug at 350'-put in 15 sacks cement-filled with mud to within 20' of top-set wooden plug-filled with cement to within 6' of ground level.

5-21-45

PLUGGING
FILE 13 29 10W
BOOK 12 32

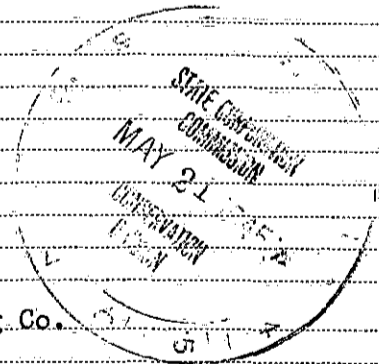

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to B & R Drilling Co.
Address Russell, Ks.

STATE OF Kansas, COUNTY OF Russell, ss.

C. L. Roberts (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. L. Roberts

Russell, Ks.
(Address)

SUBSCRIBED AND SWORN to before me this 13th day of May, 19. 45

My commission expires July 2, 1945

Genevieve Poole
Notary Public.

B & R Drilling Co.
Theis #1

Sec. 13 Twp. 29 Rge. 10
County: Kingman, Kansas

Total Depth: 4735'
Comm: 4/6/45 Comp: 5/13/45

Top of Arbuckle-4702'

Casing
17 Jts. 8 5/8" Set at 352'

Cement
250 Sacks

Formation:	Depth:
Surface Clay & Sand	40'
Sand & Shale	115
Red Bed & Shale, Shells	140
Iron, Red Bed	200
Red Bed & Shells	355
Shale & Red Bed	500
Shale & Shells	900
Blue Shale	1045
Salt & Shale	1205
Salt, Shale & Shells	1440
Anhydrite & Lime	1550
Shale & Shells	1555
Anhydrite & Sandy Lime	1660
Lime & Shale	1980
Hard Sand	1987
Lime & Shale	2210
Shale & Shells	2260
Lime & Shale	2280
Shale & Shells	2420
Lime & Shale	2540
Shale & Shells	2605
Lime & Shale	2650
Shale	2685
Lime & Shale	3005
Sandy Lime & Shale	3190
Lime & Shale	3310
Lime	3350
Shale & Lime	3385
Lime	3450
Lime & Shale	3510
Sandy Lime & Shale	3545
Lime	3791
Hard Lime	3801
Broken Lime	3816
Lime	3870
Hard Lime	3885
Soft Lime	3890
Lime	4076
Lime & Shale	4106
Lime	4118
Cherty Lime	4128
Lime	4145
Lime & Shale	4234
Mississippi Lime (Cherty)	4270
Mississippi Lime	4313
Lime	4342
Lime & Shale	4372
Kinderhood Shale	4392
Shale & Lime	4490
Shale	4523
Shale & Lime	4573
Cherty Lime	4584
Lime, Sand	4622
Sand	4645
Lime	4658
Lime & Shale	4705
Arbuckle Lime	4735

13 29 100
12 32

STATE OF KANSAS)
RUSSELL COUNTY) SS

I hereby certify that the above information is true and correct to the best of my knowledge.

Subscribed and sworn to before me this 14th day of May, 1945.

Clara L. Hummel
Genevieve Poole
Notary Public
My comm. expires July 21, 1945

