

STATE CORPORATION COMMISSION
CONSERVATION DIVISION - Plugging Section
130 S. Market, Room 2078
Wichita, Kansas 67202

2-2

API NUMBER: 15-191-21,954 - 0000

APPROX SW NW SE, SECTION 16 TOWNSHIP 35 RANGE 4W

OPERATOR LICENSE # 30184
OPERATOR CD OPERATING COMPANY
NAME & 3503 NW 63RD STREET #300
ADDRESS OKLAHOMA CITY, OK 73116

1550
3730 FEET FROM S SECTION LINE
2970 2310 FEET FROM E SECTION LINE
LEASE NAME: SHELDON 1-16
COUNTY: SUMNER
WELL TOTAL DEPTH: 5200' 169.00
PIPE: 4 1/2" @ 5200'
SURFACE CASING: 8 5/8" @ 270'

ABANDONED OIL WELL GAS WELL _____ INPUT WELL _____ SWD _____ D&A _____

OTHER WELL AS HEREINAFTER INDICATED: _____

PLUGGING CONTRACTOR: SELECT WELL SERVICE
ADDRESS: HENNESSEY, OK LICENSE: 32027

COMPANY TO PLUG AT: HOUR: _____ DAY: _____ MONTH: _____ YR: 1997

PLUGGING PROPOSAL RECEIVED FROM: MIKE MOORE
COMPANY NAME: EIGHT ROUND CORPORATION PHONE: _____
WERE: CIBP 4850' AND 2 SACKS
35 SACKS AT 850'
CIRCULATE CEMENT AT 320'

RECEIVED
KANSAS CORPORATION COMMISSION

FEB 19 1997

PLUGGING PROPOSAL RECEIVED BY: STEVE VAN GIESON CONSERVATION DIVISION
WICHITA, KS

PLUGGING OPERATIONS ATTENDED BY AGENT? ALL { _____ } PART { _____ } NONE { }

COMPLETED: HOUR: 11:30 DAY: 2 MONTH: 2 YEAR: 1997

ACTUAL PLUGGING REPORT: A CIBP WAS SET AT 4850' AND CAPPED WITH 2 SACKS OF CEMENT.
PIPE WAS RECOVERED FROM 3066' AND PULLED TO 868' WHERE 35 SACKS OF CEMENT WAS
SPOTTED. THE CASING WAS PULLED TO 320' WHERE CEMENT WAS CIRCULATED TO SURFACE.

REMARKS: 60/40 POZ 4% GEL ASC CEMENTING

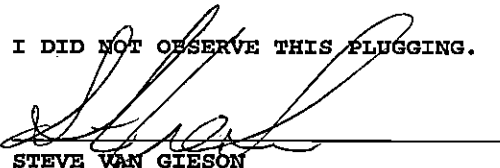
INVOICED

DATE 2-19-97

INV. NO. 47600

2-2

I DID NOT OBSERVE THIS PLUGGING.


STEVE VAN GIESON