

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Barber County. Sec. 9 Twp. 34S Rge. (E) 15 (W)

Location as "NE/4NW/4SW/4" or footage from lines Center SE/4 SE/4

Lease Owner The Chicago Corporation

Lease Name Davis Ranch B Well No. 1

Office Address Box 808, Enid, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed April 12 19 55

Application for plugging filed April 13 19 55

Application for plugging approved Verbal April 13 19 55

Plugging commenced April 13 19 55

Plugging completed April 13 19 55

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production..... 19.....

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. M. R. Rives

Producing formation..... Depth to top..... Bottom..... Total Depth of Well 5378 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Lansing - K.C.	G.C. Saltwtr	4334	4354	9 5/8	423.85	None
Lansing - K.C.	G.C. Saltwtr	4482	4521			
Viola	Salt-water	5209	5246			
Arbuckle	Salt-water	5353	5378			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from..... feet to..... feet for each plug set.

Circulated heavy mud to bottom. Set 30 sacks cement plug at 400'!
Heavy mud to 30 feet. 20 sacks cement plug on top.

FILED
APR 21 1955
CONSERVATION DIVISION
Wichita, Kansas

4-21-1955

Name of Plugging Contractor Big Chief Drilling Company
Address Oklahoma City, Oklahoma

STATE OF OKLAHOMA COUNTY OF GARFIELD, SS.
R. W. Coburn, Dist. Superintendent (employee of ~~operator~~ operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. W. Coburn


Box 808, Enid, Oklahoma
(Address)

SUBSCRIBED AND SWORN to before me this 19 day of April, 1955

My commission expires August 14, 1958
Eldon A. Morgan Notary Public.

PLUGGING
FILE SEC 9 134/50
BOOK PAGE 111 111 21

TO KANSAS CORPORATION COMMISSION
 Conservation Division
 800 Bitting Building
 Wichita, Kansas

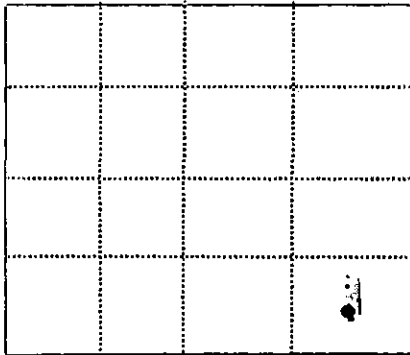

County Barber SEC. 9m TWP. 34S R. 15W

COMPANY OPERATING The Chicago Corporation

OFFICE ADDRESS Box 808, Enid, Oklahoma

FARM NAME Davis Ranch "B" WELL NO. 1

WELL LOCATED Center of SE/4 SE/4 660 FSL 660 FEL

CHARACTER OF WELL Dry hole

DRILLING COMMENCED March 14, 1955 DRILLING COMPLETED April 12, 1955

SIZE	WEIGHT	THDS	MAKE	FT.	AMOUNT PULLED	CEMENT
9 5/8	36#	8 Rd	J-S National	423.85		200 sacks

FORMATION RECORD

	TOPS	BOTTOM	TOPS	BOTTOM
Red bed	0	954		
Shale & Shells	954	1477		
Shaley, lime, shell	1477	1738		
Lime, shell	1738	1940		
Lime	1940	2043		
Shale-lime	2043	2210		
Lime	2210	2519		
Lime-shale	2519	3330		
Lime	3330	3710		
Sand	3710	3726		
Sand, lime, shale	3726	3846		
Shale-lime	3846	3941		
Douglas sand	3941	4075		
Shale	4075	4105		
Kansas City lime	4105	4173		
Lime	4173	5378		

RECEIVED
 STATE CORPORATION COMMISSION
 APR 17 1955
 CONSERVATION DIVISION
 Wichita, Kansas

Subscribed and sworn to before me
 this 13 day of April, 1955

My Commission expires August 14, 1958

W. L. Baker
 Superintendent
PLUGGING
Edson A. Morgan
 Notary Public
 FILE SEC. 9 TWP. 34S R. 15W
 BOOK PAGE 11 LINE 21