


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

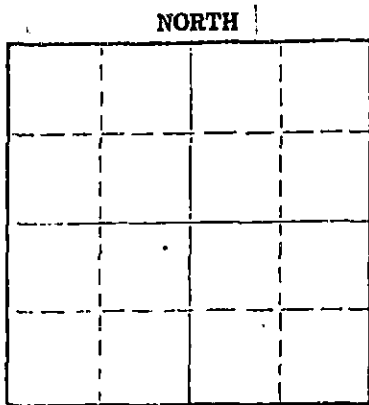

Locate well correctly on above Section Plot

Pratt County, Sec. 2 Twp. 29S Rge. ~~XXX~~ 13 (W)
Location as "NE/CNW/SE/SW" or footage from lines C NE SW
Lease Owner Sohio Petroleum Company
Lease Name Trout Well No. 1
Office Address P. O. Box 673, Russell, Kansas 67665
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 5-6 19 75
Application for plugging filed Verbal 5-6-75 Written 5-14 19 75
Application for plugging approved Verbal 5-6-75 Written 5-9 19 75
Plugging commenced 5 AM 5-6 19 75
Plugging completed 6 AM 5-6 19 75
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well G. Russell Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4790 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	298'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pump plug, 35 sacks cement to 250 feet. Mud to 40', plug, 1/2 sack hulls, 15 sacks cement to surface, 2 sacks cement in rat hole. Pumped by Halliburton.

RECEIVED
STATE CORPORATION COMMISSION

05-15-75 MAY 15 1975

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Gabbert-Jones, Inc. CONSERVATION DIVISION
Address 830 Sutton Place, Wichita, Kansas 67202 WICHITA, KANSAS


STATE OF Kansas COUNTY OF Russell
W. H. Ward (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. H. Ward
P. O. Box 673, Russell, Kansas 67665
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of May 19 75

My commission expires 9-28-75

Juanita Valentine
Notary Public.



GABBERT-JONES, INC.
 WICHITA, KANSAS
 DRILLERS' WELL LOG

C C Trout #1
 NE-SW Sec 2-29S-13W
 Pratt County

Commenced: 4-21-75

Completed: 5-6-75

OPERATOR: SOHIO PETROLEUM CO.

Depth		Formation	Remarks
From	to		
0	175	Shale-Sand	
175	270	Shale-Redbed	Ran 7 jts of used 8 5/8" csg set @ 305' Cemented w/300 sks
270	1108	Redbed	
1108	2035	Shale-Shells	Common 2% Gel -3% CC PD @ 2:45 P.M 4-22-75
2035	3420	Shale-Lime	
3420	3600	Lime-Shale	
3600	3730	Shale-Lime	
3730	3870	Lime-Shale	
3870	3970	Shale-Lime	
3970	4642	Lime	
4642	4651	Sand	
4651	4710	Shale-Sand	
4710	4760	Sand-Shale	
4760	4790	Lime	
	4790 - TD		DRY AND ABANDONED

I, James S. Sutton II, certify this is a correct copy of the Drillers' Log for the well drilled NE-SW Sec. 2-29S-13W Pratt County, Kansas to the best of my knowledge and belief.

MAY 15 1975

NOTARY PUBLIC DIVISION
 Wichita, Kansas

James S. Sutton II
 JAMES S. SUTTON II

STATE OF KANSAS)
) SS:
 COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 12th day of May, 1975, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

Marjorie Hall
 MARJORIE HALL-NOTARY PUBLIC



My Commission Expires: November 29th, 1975.