


7-9-51 15-173-00525-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

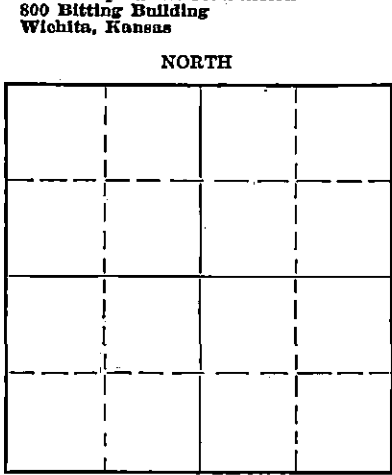

Locate well correctly on above Section Plat

Sedgwick County. Sec. 5 Twp. 28 Rge. 1 (E) 1 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW SW SW
Lease Owner Schmitz Eckland Drilling Company
Lease Name Schmitz Well No. 1
Office Address 218 Bissantz Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed Dec. 4th, 1949 19
Application for plugging filed June 19th, 1951 19
Application for plugging approved June 19th, 1951 19
Plugging commenced June 20th, 1951 19
Plugging completed June 26th, 1951 19
Reason for abandonment of well or producing formation Exhausted

If a producing well is abandoned, date of last production March, 1951 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well J. P. Roberts
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Total Depth 3400
filled hole with chat to 3370
run 5 sks cement from 3370 to 3335!
filled with mud to 160'
bridge solid with rock from 160' to 150'
run 10 sks cement 150' 120'
filled with mud 120' to 15'
capped with 5 sacks cement

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Eckland Drilling Company
Address 218 Bissantz Building
Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
P. A. Eckland (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) P. A. Eckland

(Address) _____
Notary Public.

SUBSCRIBED AND SWORN to before me this 5th day of July, 1951.

My commission expires November 18, 1952

22-7377-8 4-49-10M

JUL - 9 1951

PLUGGING
FILE SEC 5787 R 1W
BOOK PAGE 89 LINE 10

CONSERVATION DIVISION
Wichita, Kansas

15-173-00325-0000

LOCATION: Schmitz No.1
NW SW S^W
Section 5-28-1W
Sedgwick County, Kansas

COMPANY: ECKLAND DRILLING COMPANY

CONTRACTOR: ECKLAND DRILLING COMPANY

Casing: 156' 8 7/8"
100 sks cement

COMMENCED: 11-22-49

Total Depth: 3370'

COMPLETED: 12-5-49

PLUGGED: 6-26-51

156	cement	3082	lime shale
190	shale shells	3139	lime shale
400	shale shells	3190	lime shale
410	shale shells	3257	shale lime
425	anhydrite	3249	lime shale
610	lime shale	3269	shale
720	lime shale	3344	shale
745	anhydrite	3356	chat
785	lime	3370	chat Miss.Lime
855	lime shale	3370	T.D.
925	lime		
940	anhydrite		
950	lime		
1160	lime shale		
1405	shale shells		
1420	shale shells		
1470	shale shells		
1503	sand (water)		
1570	shale lime		
1720	lime shale		
1860	lime shale		
2035	lime shale		
2170	lime shale		
2280	lime shale		
2365	lime shale		
2470	lime shale		
2495	lime shale		
2510	sand lime shale		
2585	lime shale brks		
2675	lime shale		
2755	lime shale		
2774	lime shale		
2818	K.C.Lime	Top K.C. 2774	
2880	K.C.lime		
2920	Lime		
2970	lime		
3015	lime shale		
3044	lime shale		

RECEIVED
STATE OF KANSAS
JUL 9 1951
COMPLETION DIVISION
WICHITA

PLUGGING
FILE: SEC 5-28-1W
BOOK PAGE 89/10