

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-063-22189-00-00
Spot: NENWSWNE Sec/Twnshp/Rge: 26-14S-31W
3898 feet from S Section Line, 2232 feet from E Section Line
Lease Name: T-NELSON Well #: 1-26
County: GOVE Total Vertical Depth: 4508 feet

Operator License No.: 31120
Op Name: PELICAN HILL OIL & GAS, INC.
Address: 3355 MISSION AVE STE 237
OCEANSIDE, CA 92058

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4508	832	170 SX
SURF	8.625	210		170 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 04/16/2015 9:00 AM
Plug Co. License No.: 34082 Plug Co. Name: ALLIANCE WELL SERVICE INC.
Proposal Rcvd. from: MARK KLEIN Company: PELICAN HILL OIL & GAS Phone: (405) 321-7171

Proposed Plugging Method: Ordered 400 sx 60/40 pozmix 4% gel cement, 10 sx gel and 600 # hulls.
Perforations: 3835' - 3841', 4032' - 4037', 4045' - 4048', 4098' - 4102', 4376' - 4380'.
Shot perforation at 2225' and 1300'.
Shot casing off at 832'.

Plugging Proposal Received By: RICHARD WILLIAMS WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 04/16/2015 9:00 PM KCC Agent: MARVIN MILLS

Actual Plugging Report:

Ran tubing to 3920' and pumped 15 sx gel followed by 75 sx cement w/300 # hulls. Pulled tubing to 2235' and pumped 50 sx cement. Pulled tubing out of hole and shot casing off at 836'. Pulled all casing out of hole. Ran tubing back in to 1330'. Pumped 250 sx cement. Good circulation of cement to surface. Well bore is full of cement.

GPS: 38.81236 -100.73338

Perfs:

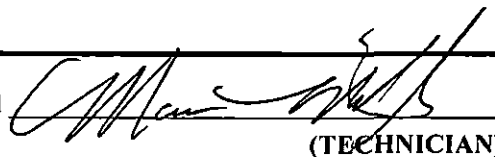
Top	Bot	Thru	Comments
4376	4380		
4098	4102		
4045	4048		
4032	4037		
3835	3841		

Remarks: CONSOLIDATED CEMENT TICKET # 49419

Plugged through: TBG

District: 04

Signed


(TECHNICIAN)

5/6/15 ckm

CM

KCC WICHITA

APR 24 2015

RECEIVED

APR 20 2015