

STATE OF KANSAS  
STATE CORPORATION COMMISSION

15-173-00465-0000

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Sedgwick County. Sec. 36 Twp 28S Rge. (E) 1 W W

Location as "NE/CNW%SW%" or footage from lines NE NE NW

Lease Owner Kewanee Oil Company

Lease Name Gladys Unit, Tract 8 Well No. 1 WI

Office Address P. O. Box 157, Haysville, Kansas 67060

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 1-21- 19 55

Application for plugging filed 8-11- 19 71

Application for plugging approved 8-16- 19 71


Plugging commenced 8-24- 19 71

Plugging completed 10-12- 19 71

Reason for abandonment of well or producing formation no longer needed as input well.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

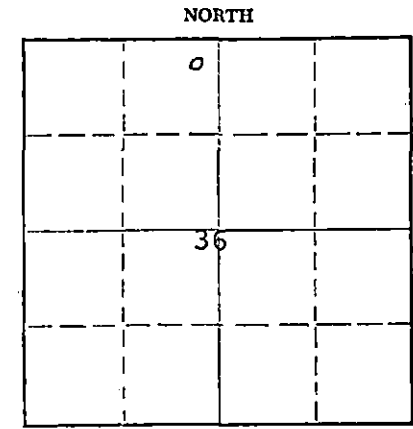

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Ted Dewey  
Producing formation Mississippi Depth to top 3213 Bottom          Total Depth of Well 3225 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>Kansas City</u>		<u>2691</u>		<u>8-5/8</u> <u>5-1/2</u>	<u>170</u> <u>3213</u>	<u>none</u> <u>2183</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from          feet to          feet for each plug set.

Ran Halliburton EZ drill packer on 2" tubing set @ 3093'. Pumped 100 sacks Pozmix @ 1600#. Pulled out and dumped 1/2 barrel cement on top of packer.

Ripped casing and recovered 2183'. Set rock bridge from 220-235'. Dumped 4 cu.yds. ready mix to surface.

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 22 1971  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Flint Engineering Company  
Address Eldorado, Kansas


STATE OF Kansas, COUNTY OF Sedgwick, ss.  
S. A. Park (employee of owner) or (~~owner or operator~~) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) S. A. Park  
P. O. Box 157, Haysville, Kansas  
(Address)

DESCRIBED AND SWORN to before me this 18th day of October, 1971

My commission expires 8-10-75  
Billie Oden Notary Public.



15-173-00465-0008

PR

COPY

Gladys Unit  
Tr. 8#1

DRILLING LOG

WELL NAME: John Hay #1

LOCATION: NE NE NW 36-28S-1W,  
Sedgwick County, Kansas

OWNER: Wilcox Oil Company

CONTRACTOR: Laura Jane Oil Company, Inc.

ELEVATION: 1295' KB

CASING RECORD: 170' - 8-5/8"  
3213' - 5-1/2"

PRODUCTION:

FORMATION:	TO.	TOPS	
Surface Soil & Clay	20	Kansas City Lime	2691'
Sand	50	Mississippi Lime	3196'
Shale & Clay	80	Mississippi Dolomite	3213'
Shale	165		
Anhydrite	290		
Shale & Lime	760		
Shale & Shells	1070		
Shale & Shells	1170		
Sand & Shale	1280		
Shale & Shells	1765		
Shale & Lime	1900		
Sandy Lime & Shale	2025		
Sand-Lime-Shale	2265		
Sandy Shale	2345		
Shale & Lime	2375		
Sand	2475		
Shale & Lime	2537		
Shale	2692		
K. C. Lime	2806		
Lime	2894		
Shale & Lime	3196		
Shale & Lime	3213		
Dolomite	3217 - RTD		

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 16 1971  
CONSERVATION DIVISION  
Wichita, Kansas

I hereby certify that the above is a true and correct copy of the log of the John Hay #1, NE NE NW 36-28S-1W, Sedgwick County, Kansas, to the best of my knowledge.

LAURA JANE OIL COMPANY, INC.

BY: /s/ D. M. Shawver  
D. M. Shawver, President

Sworn and subscribed to before me this 25th day of January, 1955.

/s/ Rosemary Penrose  
Notary Public