


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

15-173-00505-0000

WELL PLUGGING RECORD

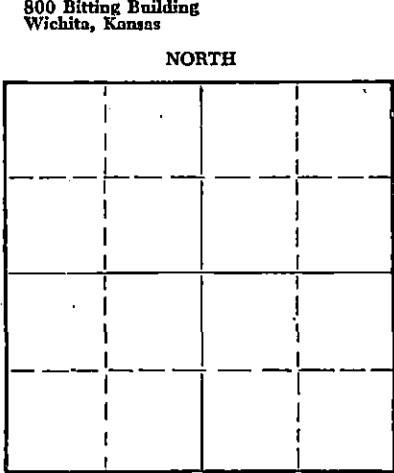

Sedgwick County. Sec. 36 Twp. 28 Rge. 1 (E) 1 (W)  
Location as "NE/CNW/SW" or footage from lines SW NW SW  
Lease Owner Wilcox Oil & Gas  
Lease Name Roy Well No. 1  
Office Address Shawver-Armour, Inc. 817 Central Building  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 3-6-55 19  
Application for plugging filed 3-6-55 19  
Application for plugging approved 3-6-55 19  
Plugging commenced 3-6-55 19  
Plugging completed 3-7-55 19  
Reason for abandonment of well or producing formation Dry Hole  
If a producing well is abandoned, date of last production None 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Ruel Durkee  
Producing formation Mississippi Depth to top 3287 Bottom            Total Depth of Well 3357 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface				8-5/8	245	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from            feet to            feet for each plug set.

3357 to 210 fill with heavy mud  
210 Set wood & rock bridge plug and cemented w/15 sx  
210 to 15 fill w/ heavy mud. set wood & rock bridge plug  
15 to 0 Cement w/5 sax cement

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shawver-Armour, Inc.  
Address 817 Central Building

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
James Armour (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James M. Armour  
817 Central Bldg.  
(Address)

SUBSCRIBED AND SWORN to before me this 15 day of March, 19 55

My commission expires Mar 30, 1957

Lawrence P. Benson  
Notary Public.

**PLUGGING**  
FILE SEC 36 T 28 R 14  
BOOK PAGE 103 LINE 10

RECEIVED  
STATE CORPORATION COMMISSION  
APR 14 1955 4-14-1955  
CONSERVATION DIVISION  
Wichita, Kansas

DRILLING LOG

COMPANY: Wilcox Oil & Gas Co. Location: SW-NW SW 36-28-1W  
 Sedgwick County  
 CONTRACTOR: Shawver-Armour, Inc.  
 FARM NAME: Roy #1 Elevation: 1300 KB  
 COMMENCED: Feb. 26, 1955  
 COMPLETED: March 7, 1955

CASING RECORD

8-5/8" 245 W 220 sx cem

FORMATION:	FROM	TO	
Sand, Gravel & Clay	0	225	
Anhydrite		245	
Lime & Shale		260	
Shale & Lime Shells		565	TOPS
Sandy Shale & Shells		755	
Shale & Shells		1100	Stalnaker 2430
Lime & Shale		1700	Kansas City 2744
Lime		1770	Mississippian 3287
Lime & Shale		2472	RTD 3357
Shale & Red Bed		2539	
Shale		2692	
Lime & Shale		2840	
Lime		2910	
Lime & Shale		2982	
Lime		3078	
Shale & Lime		3340	
Lime		3357	

STATE OF KANSAS )  
 ) ss  
 SEDGWICK COUNTY )

I, H. D. Shawver, do hereby certify that the above is a true and correct copy of the log on the above captioned well, as shown on the daily drilling reports.

SHAWVER-ARMOUR, INC.

By H. D. Shawver  
 H. D. Shawver, President

Subscribed and sworn to before me this 10 day of April 1955.

Mildred Lundquist  
 Notary Public

My commission expires July 19, 1956.

**PLUGGING**  
 FOR SEC 36 T 27 R 1W  
 COCK PAGE 103 LINE 10

**RECEIVED**  
 STATE CORPORATION COMMISSION  
 APR 19 1955  
 CONSERVATION DIVISION  
 Wichita, Kansas