

SR

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

15-173-61528-0000
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Sedgwick County, Sec. 36 Twp. 28S Rge. 1W (E) (W)

Location as "NE/CNWxSWx" or footage from lines SE SW NE

Lease Owner Kewanee Oil Company

Lease Name Tract 10 Well No. 11W

Office Address Box 157, Haysville, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Water Input

Date well completed 11-22 19 56

Application for plugging filed 9-23 19 69

Application for plugging approved 9-24 19 69


Plugging commenced 10-13 19 69

Plugging completed 10-24 19 69

Reason for abandonment of well or producing formation No longer needed as input.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

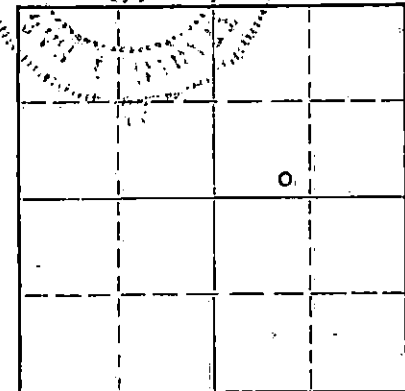

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Ted Dewey 3307

Producing formation Miss. Dolomite Depth to top 3206 Bottom Total Depth of Well 3234 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Kansas City		2683		8-5/8	162	
Miss Chert		3192		5-1/2	3205	2030'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Ran Baker cement retainer set @ 3110'. Mixed 100 sacks cement and squeezed Mississippi @ max. pressure of 1900#.

Set 20' rock bridge @ 200' and added 4 cu. yds. readymix to surface.

RECEIVED
STATE CORPORATION COMMISSION
OCT 31 1969
CONSERVATION DIVISION
Wichita, Kansas

10-31-1969

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Flint Engr.

Address El Dorado, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.


J. G. Booth (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) J. G. Booth

Box 157, Haysville, Kansas (Address)

Subscribed and sworn to before me this 30 day of Oct. 1969

Sam B. McNeil Notary Public.



KEWANEE OIL COMPANY
WELL RECORD

GLADYS UNIT
TRACT 10 #14

Kewanee Oil Company
Wauketa (Wright) No. 14
SE SW NE
Sec. 36-28S-1W
Sedgwick County, Kansas

Comm: 11-14-56
Comp.: 11-22-56
Contractor:
E. H. Adair - Rig No. 3.
8-5/8 @ 162 ft. w/150 sax.
5-1/2 @ 3205 ft. w/100 sax.

15-173-01528-0000

Figures Indicate Bottoms of Formations

Lime and shale	to	185	Shale & lime	to	3092
Lime		450	Shale		3096
Lime and shale		2000	Limey shale		3123
Shale		2323	Shale		3127
Lime		2327	Shale & lime		3147
Shale		2357	Lime		3150
Sand		2398	Limey shale		3165
Shale		2408	Shale		3169
Sand		2470	Colored shale		3192
Lime		2488	Chert		3194
Shale		2683	Lime		3212
Lime		2873	R. T. D.		3212
Lime & shale		2930	Lime		3302
Shale		2932	C. T. T. D.		3302
Shale & lime		2945			
Oolitic lime		2952			
Shale & lime		2971			
Shale		2973			
Limey shale		3031			
Shale		3036			

RECEIVED
STATE CORPORATION COMMISSION
SEP 25 1969
CONSERVATION DIVISION
Wichita, Kansas

Tops

Lansing	2323 (-1034)
Stalnaker	2357 (-1068)
Kansas City	2683 (-1394)
Base K. C.	2873 (-1584)
Miss. Chert	3192 (-1903)
Miss. "Dolomite"	3206 (-1917)
R. T. D.	3212

Certified correct:

Original Signed by:
Sherrill Compton - Geologist