


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Kingman County, Sec. 34 Twp. 29S Rge. 7W (E) (W)
Location as "NE/CNW&SW" or footage from lines NW NE NE
Lease Owner Sunray DX Oil Company
Lease Name M. Wallace Well No. 1
Office Address 300 Union National Bldg. Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 9-10 19 57
Application for plugging filed 5-6 19 65
Application for plugging approved 5-7 19 65
Plugging commenced 5-27 19 65
Plugging completed 5-27 19 65
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 4-26 19 65
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

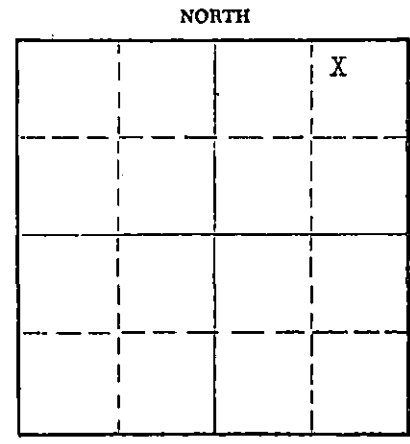

Name of Conservation Agent who supervised plugging of this well A. Elving Box 248 Pratt, Kansas
Producing formation MissChat Depth to top 4146' Bottom 4121' Total Depth of Well 4148' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUR IN	PULLED OUT
Mississippi	Oil	4110	4116	8 5/8	298	--
				5 1/2	4150	3124

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

50 Gal. of sand from 4115' to 4100'; 5 sacks of cement at 4100'. Shot at 3230', Not loose, 3140' loose. Pulled 3124' of 5 1/2 csg. Mud at 250'. Set rock bridge at 240'. Set 25 sacks of cement. Mud at 40'. Set 10' rock bridge and 10 sacks of cement to surface.

RECEIVED
STATE CORPORATION COMMISSION
JUN 1 1965
CONSERVATION DIVISION
Wichita, Kansas
6-1-1965

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Knight Casing Pulling Company
Address Box 405 Chase, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
V. A. Tracy (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. A. Tracy
300 Union National Bldg. Wichita, Kansas
(Address)

Subscribed and sworn to before me this 28th day of May, 1965

My commission expires My Commission Expires March 28, 1969

Mae Resco
MAE RESCO Notary Public.

Sunray Mid-Continent Oil Company
Tulsa, Oklahoma

Tulsa, Oklahoma
September 12, 1957

15-095-00527-0000

CONTRACTOR: Stickle Drilling Company
Drilling Commenced: August 30, 1957
Drilling Completed: September 10, 1957

M. Wallace #1 - E/2 NE/4
of Section 34-29S-7W,
Kingman County, Kansas.

DRILLERS LOG

Depth Figures Indicate Base of Formation

Red Rock	190
Red Bed, Shale, & Shells	475
Shale & Shells	1015
Anhydrite	1080
Shale & Shells	1120
Lime & Shale	1340
Shale	1360
Lime	1490
Lime & Shale	1760
Shale & Lime	2110
Lime & Shale	2365
Shale & Lime	2720
Lime & Shale	3640
Lime	3682
Lime & Shale	3739
Lime	3809
Lime & Shale	4132
Lime & Chert	4248 TD

RECEIVED
STATE CORPORATION COMMISSION

MAY 7 1965

CONSERVATION DIVISION
Wichita, Kansas

I, Frank E. Stickle, hereby certify the above to be a true and complete Driller's Log of Sunray Mid-Continent Oil Company's M. Wallace #1 - E/2 NE/4 of Section 34-29S-7W, Kingman County, Kansas.

Frank E. Stickle
Frank E. Stickle

Lillian T. Bonham
Notary Public

February 13, 1960

My Commission Expires