
Form CP-3 Rev. 6-26-62

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

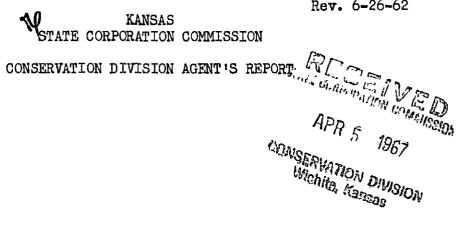

Operator's Full Name Ashland Oil & Refining Company
Complete Address: Box 18695, Oklahoma City, Oklahoma
Lease Name O.V. Ray Well No. 4
Location NW NE Sec. 21 Twp. 29 Rge. 34 (M) (W)
County Haskell Total Depth 5500
Abandoned Oil Well Gas Well X Input Well SWD Well D & A X
Other well as hereafter indicated: None
Plugging Contractor: Sargent's Casing Pulling
Address: Box 506, Liberal, Kamsas License No. 511
Operation Completed: Hour 2:00PM Day 3 Month 4 Year 1967
The Above well was plugged as follows:
8 5/8" to 1810' cibulated w/ cement. 5 1/2" to 5440' cemented.
Top perforations 4130 Plug bottom w/ 40 sacks cement.
Top of cement 4000! Mud 4000! to 600!
Spotted 35 sacks cement 600' to 500' Mud 500' to 45'
Plug, Hulls & 15 sacks cement 45' to 0' Company Pump.
Pulled 1980: of 5 1/2" casing.
I hereby certify that the above well was plugged as herein stated.
INVOICED Signed: Tolonia Tores
DATE 4/6/67 INV. NO. 5012-4
INV. NO