


15-151-20086-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

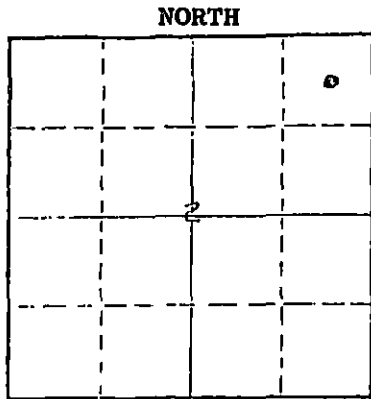

Locate well correctly on above Section Plot

Pratt County, Sec. 2 Twp. 28S Rge. 13 (E) (W) X
Location as "NE/CNW/SW" or footage from lines NE NE
Lease Owner William Gruenerwald & Associates, Inc.
Lease Name Wainner Well No. 1
Office Address Box 2137 Colorado Springs, Colorado 80901
Character of Well (completed as Oil, Gas or Dry Hole) Gas & Oil
Date well completed Aug. 29 19 68
Application for plugging filed Sept 19 19 77
Application for plugging approved Sept 22 19 77
Plugging commenced Sept 21 19 77
Plugging completed Sept 27 19 77
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Owens
Producing formation Depth to top Bottom Total Depth of Well 4380
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	VE	FROM	TO	SIZE	PUT IN	PULLED OUT
					13 3/8	181	none
					5 1/2	4380	3412

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pump 1 sk. of hulls & 20 sks. of cement w/ top @ 4200'
Squeezed w/ 2 sks. of hulls & 10 bbls. of mud & 150 sks. of cement to top.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sargents Casing Pulling Service Kansas No. 511
Address Box 506 Liberal, Kansas 67901

STATE OF Colorado COUNTY OF El Paso ss.
Jack Zimmerman (employee of owner) ~~owner or operator~~

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
P. O. Box 909, Colorado Springs, Colo. 80901
(Address)

Subscribed and sworn to before me this 6th day of October, 19 77

My commission expires 4/19/81 Lois D. Jackson Notary Public.

WELL LOG

15-151-20086-0000

COMPANY **William Gruenerwald & Associates**

SEC. 2 T. 20S R. 13W

FARM **Wainner** NO. **1**


LOC. **NE NE**

TOTAL DEPTH **4380'**

COUNTY **Pratt Co., Kansas**

COMM. **8-17-68** COMP. **8-29-68**

CONTRACTOR **Garvey Drilling Company**



CASING **13 3/8" @ 184' w/325 SX**
5 1/2" @ 4380' w/150 SX

ELEVATION

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

30' Clay
 155' Sand
 184' Red Bed
 965' Red Bed & Shale
 1555' Shale & Shells
 1735' Shale with Lime Streaks
 3776' Lime & Shale
 3933' Lime
 4000' Lime & Shale
 4130' Lime
 4240' Lime & Shale
 4300' Lime
 4307' Sand
 4321' Lime & Shale
 4325' Sand
 4350' Sand & Shale
 4380' Sand
 4380' RTD

RECEIVED
 SEP 20 1968
 PRATT, KANSAS

State of Kansas
 County of Barton } ss

I, Eunice McEachern of Garvey Drilling Company

upon oath state the above and foregoing is a true and correct copy of the log of the Wainner #1 well.

Eunice McEachern

Subscribed and sworn to before me this 5th day of September 19 68

My Commission Expires: November 5th, 1969

Richard L. Boy
NOTARY PUBLIC