


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

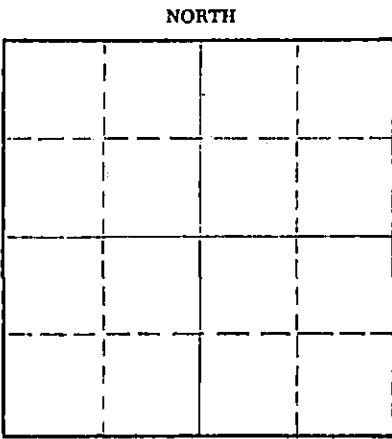

Locate well correctly on above
Section Plat

KINGMAN County. Sec. 29 Twp. 28S Rgs. 9W (E) W (W)
Location as "NE/CNW%SW%" or footage from lines SE NW NW
Lease Owner Solar Oil Company
Lease Name SWANDER Well No. 1
Office Address 1117 Union Nat'l. Bank Bldg., Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 5, 1965
Application for plugging filed February 6, 1965
Application for plugging approved February 6, 1965
Plugging commenced February 6, 1965
Plugging completed February 6, 1965
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie Elving, Pratt, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4202 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUR IN	PULLED OUT
<u>Sand, Gravel & Red Bed</u>	<u>Surface Casing</u>	<u>-0-</u>	<u>279.90'</u>	<u>8-5/8"</u>	<u>279.90'</u>	<u>None</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGED: Filled hole with heavy mud thru
drill pipe from T.D. to 260'.
Set 1st plug at ~~260'~~ 260', 1 sk.
hulls & 25 sx. cement. Filled
hole to 40', 1/4 sk. hulls.
Set plug & 10 sx. cement. 2 sx.
cement in rat hole. Finished
plugging at 10 a.m. 2-6-65.

RECEIVED
STATE CORPORATION COMMISSION
2-12-65
FEB 12 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor SIERRA PETROLEUM CO., INC.
Address 1015 Wichita Plaza Bldg., Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF RUSSELL, ss.
G. A. Hall (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G. A. Hall
G. A. Hall, Production Superintendent
Box 232, Russell, Kansas
(Address)

Subscribed and Sworn to before me this 11th day of February, 1965

My commission expires 10-17-67

Henry Dietz
Notary Public.

15.095-30007-0000

SOLAR OIL COMPANY - Operator

SIERRA PETROLEUM CO., INC. - Contractor

SWANDER #1
SE NW NW
Sec. 29-28S-9W
Kingman County, Kansas

T.D.: 4202'
Elev.: 1724' D.F.
1727' K.B.

Commenced: 1-26-65
Completed: 2-5-65

Casing:
8-5/8" Set at 279.90'

Cement:
with 200 sx.

FORMATION	DEPTH
Sand & Gravel	110
Red Bed	280
Red Bed & Shale	855
Shale & Lime	3395
Shale, Sand & Lime	3540
Lime	4145
Mississippi Chert	4202

RECEIVED
STATE CORPORATION COMMISSION
FEB 12 1965
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) ss:
COUNTY OF RUSSELL)

I hereby certify that the above information is true and correct to the best of my knowledge.

G. A. Hall
Production Superintendent

Subscribed and sworn to before me this 11th day of February, 1965.

Notary Public

My commission expires: 10-17-67