


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

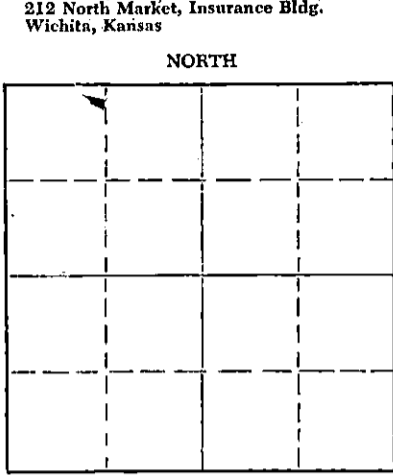

Locate well correctly on above Section Plat

Kingman County, Sec. 20 Twp. 28 Rge. 9 (E) W (W)
Location as "NE/CNW/SW" or footage from lines NW 1/2 SW SW
Lease Owner Santa Fe Pipe & Supply
Lease Name Darlington Well No. 3
Office Address P. O. Box 562, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved September 21 19 60
Plugging commenced September 19 19 60
Plugging completed September 26 19 60
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Fred Hampel
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4552 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	280'	None
				5 1/2	4551'	3614.70'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

4440'	-	4100'	sand
4100'	--	3970'	5 sacks cement
3970'	-	300'	mud
300'	-	290'	7 sacks cement
290'	-	230'	13 sacks cement
230'	-	35'	mud
35'	-	30'	rock bridge
30'	-	0	10 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
10-14-60
OCT 14 1960
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Glenn & Smith Pipe Pulling Co.
Address P. O. Box 114, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Roxton, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
P. O. Box 562, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of October, 1960
[Signature]
Notary Public.
My commission expires May 19, 1962


WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY 15-095-01753-0000
 508 East Murdock, Wichita, Kansas

Company. NEBRASKA-WYOMING OIL CO.
 Farm. Darlington No. 3

SEC. 20 T. 28 R.9W
 C W/2 SW SW

Total Depth. 4552
 Comm. 7-1-55 Comp. 7-20-55
 Shot or Treated.
 Contractor. Sterling Drilling Co.
 Issued. 1-14-56

County Kingman
 KANSAS



CASING:

8 5/8 @ 280' w/ 250 sx cmt.
 5 1/2 @ 4551' w/ 125 sx cmt.

Elevation. 1704 RB

Production. 25 BOPD

Figures Indicate Bottom of Formations.

sand & shale	285
shale & red bed	950
shale & shells	1415
lime & shale	1530
lime	1990
shale & lime	2090
shale & shells	2260
shale & lime	3215
lime	3390
sand & shale	3438
shale	3470
shale & lime	3535
lime	4095
shale & lime	4115
chert & lime	4165
lime & shale	4285
shale	4345
shale & lime	4385
Viola lime	4390
lime	4394
Viola chert	4402
lime	4465
coring Simpson	4525
shale	4540
shale & lime	4552
Total Depth	

SCOUT TOPS:	
Mississippi	4115
Kinderhook	4180
Viola	4390
Simpson shale	4448
Arbuckle	4546

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 14 1960
 CONSERVATION DIVISION
 Wichita, Kansas