

15-081-10152-0001

RECEIVED
STATE CORPORATION COMMISSION

FORM CP-4

MAY 3 1982

5-3-82

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

CONSERVATION DIVISION
Wichita, Kansas

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Haskell County. Sec. 33 Twp. 29S Rge. 33 /W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines


Lease Owner Amoco Production Company
Lease Name W. E. Preedy Well No. 2
Office Address P. O. Box 432 Liberal, KS 67901
Character of Well (Completed as Oil, Gas or Dry Hole)
Salt Water Disposal

Date Well completed Jan 5, 1963
Application for plugging filed Mar 12, 1982
Application for plugging approved Mar 16, 1982
Plugging commenced Apr 14, 1982
Plugging completed Apr 19, 1982
Reason for abandonment of well or producing formation

An irreparable casing leak
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation Depth to top Bottom Total Depth of Well 5000
Show depth and thickness of all water, oil and gas formations.

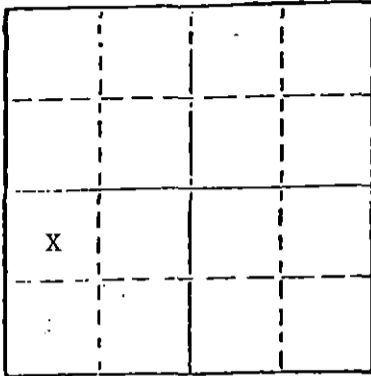

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Des Moines		4778		8-5/8"	720	0
Lansing		4178		5-1/2"	5017	1130
Topeka		3904				
Council Grove		2936				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set cast iron bridge plug at 3598: Put 2 sacks of Portland cement on plug.
Shot pipe at 1130' Pumped 220 sacks from 1100; to surface. Cut off 8-5/8" casing 15' below surface, pump 20 sacks of cement to surface, weld on 10 plate.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Midwest Casing Pullers

STATE OF Kansas COUNTY OF Seward, ss.
R. C. Carlson (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. C. Carlson
P. O. Box 432 Liberal, KS 67901
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of April, 19 82

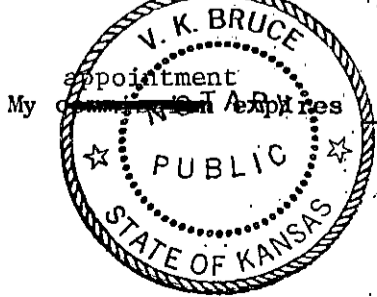

My appointment expires 4-28-85

V. K. Bruce V. K. Bruce
Notary Public.