


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

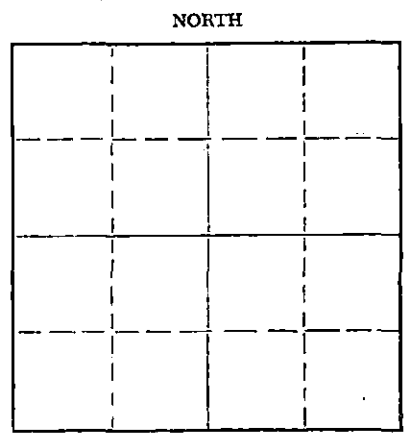

Locate well correctly on above  
Section Plat

Haskell County. Sec. 21 Twp. 29 Rge. 34W XX (W)  
Location as "NE/CNW/SW" or footage from lines NW NE  
Lease Owner Ashland Oil & Refining Company  
Lease Name O. V. Ray Well No. 4  
Office Address Box 18695 Oklahoma City, Oklahoma 73118  
Character of Well (completed as Oil, Gas or Dry Hole) GAS  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced \_\_\_\_\_ 19\_\_\_\_  
Plugging completed April 3, 19 67  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Edgar Eves  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 5500' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1810'	NONE
				5 1/2"	5440'	1980'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

8 5/8" to 1810' circulated with cement.  
Top perforations 4130'  
Top of cement 4000'  
Spotted 35 sacks cement 600' to 500'  
Plug, Hulls & 15 sacks cement 45' to 0'  
Pulled 1980' of 5 1/2" casing.  
5 1/2" to 5440' cemented  
Plug bottom with 40 sacks cement.  
Mud 4000' to 600'  
Mud 500 to 45"  
Company pump

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 3 1968  
CONSERVATION DIVISION  
Wichita, Kansas

5-3-68

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Sargents Casing Pulling  
Address Box 506 Liberal, Kansas

STATE OF Kansas, COUNTY OF Haskell, ss.  
Felix C. Turley (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Felix C. Turley

SUBSCRIBED AND SWORN TO before me this 2nd day of May, 19 68

My commission expires October 1, 1970

H. J. Hengler  
Notary Public.