


DISTRICT CONSERVATION AGENT'S REPORT

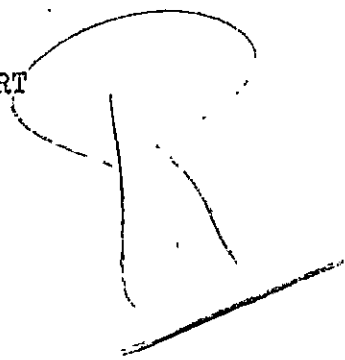

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. 102-26

LOCATION NW NW NE

SEC. 18 TWP. 29 RGE. 12

Dry Hole        Abandoned Oil Well X Abandoned Gas Well       

I have today completed supervision of plugging of:

Well No. 4-1 Lease Buebaker Brubaker "B"

Operator Co-op Refg Assn Address Box 765 Great Bend

Field        County Pratt

Total Depth 4457 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 800' circulated with cement - 5 1/2" at 4443'  
with 200 sax behind.

Chat to 4440', set 5 sax cement with dump bailer, pulled  
3080' 5 1/2", filled hole with mud to 250', set rock and  
15 sax cement, filled with mud to 55', set rock and  
10 sax cement to bottom cellar.

RECEIVED  
STATE CORPORATION COMMISSION

SEP 1 X 1951 09-01-51

COOP. DIVISION  
C. W. Steinhilber  
District Conservation Agent

Date 8-27-51

PLUGGING  
FILE SEC. 18 TWP. 29 R. 12  
BOOK 102 PAGE 26 LINE 26