

15-097-10138-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Kiowa County. Sec. 27 Twp. 29 Rge. (E) 18(W)
Location as "NE/CNW/SW" or footage from lines C NE SW

Lease Owner Misco Supply Company
Lease Name Mollie Greenwood Well No. 5
Office Address 257 N. Broadway, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 19
Application for plugging filed July 28 19 71
Application for plugging approved 19
Plugging commenced August 18 19 71
Plugging completed August 26 19 71
Reason for abandonment of well or producing formation depleted
If a producing well is abandoned, date of last production 19

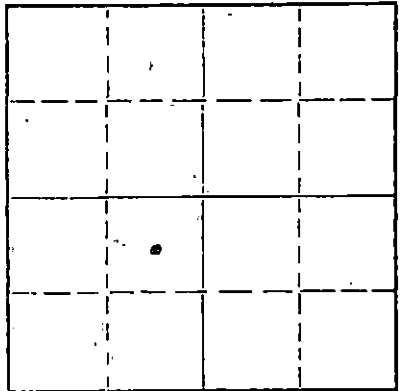

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4990 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	408'	10 3/4"	408'	none
		0	4985'	5 1/2"	4985'	2513.08

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded back to 4950' and dumped 5 sacks of cement.
Set 20' rock bridge at 260'. Plugged well with 6 yards of ready mix cement.

RECEIVED
STATE CORPORATION COMMISSION
SEP 15 1971
CONSERVATION DIVISION
Wichita, Kansas

9-15-71

Name of Plugging Contractor PIPE PULLERS, INC.
Address Box 486, Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
Evelyn Roth (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of September, 1971

My commission expires Feb. 10, 1975

Sarge A. Meyer
Notary Public.


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company. OHIO OIL COMPANY
Farm. Mollie Greenwood No. 5

SEC. 27 T. 29 R. 18W
C NE SW

Total Depth. 4990'
Comm. 2-26-57 Comp. 3-14-57
Shot or Treated.
Contractor.
Issued. 9-14-57

County Kiowa
KANSAS



Elevation. 2237' RB

Production. 77 BO & 148 BW

CASING:
10 3/4" 408'
5 1/2" 4985'

Figures indicate Bottom of Formations.

red beds & shells	1260
shale & red beds	1727
shale & shells	2105
shale, shells & anhydrite	2296
shale & anhydrite	2563
shale, lime & anhydrite	2629
anhydrite & shale	2675
shale & lime	3161
shale, lime & chalk	3273
shale & lime	3915
lime	4015
shale & lime	4336
lime	4534
lime & shale	4576
lime	4670
lime & shale	4713
lime	4813
lime & shale	4850
lime & chert	4990
Total Depth	

TOPS:

Brown Lime	4334
Lansing-Kansas City	4346
Mississippi Chert	4956

Show of gas & oil from 4960' to 4990'.

RECEIVED
STATE CORPORATION COMMISSION
JUL 29 1971
CONSERVATION DIVISION
Wichita, Kansas