


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

NORTH

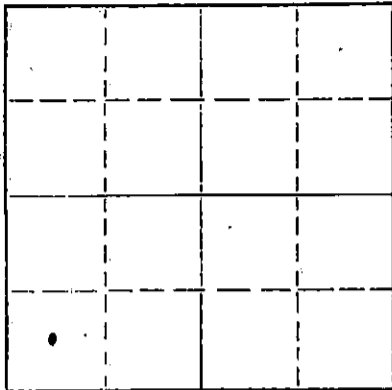

Locate well correctly on above
Section Plat

Kiowa County. Sec. 27 Twp. 29 Rge. 18 (E) 18 (W)
Location as "NE/CNW/SW" or footage from lines C SW SW
Lease Owner Misco Supply Company
Lease Name Mollie Greenwood Well No. 4
Office Address 257 N. Broadway, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed _____ 19____
Application for plugging filed July 28 1971
Application for plugging approved _____ 19____
Plugging commenced July 31 1971
Plugging completed August 4 1971
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4934 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	409'	10 3/4"	409'	none
		0	4930'	5 7/8"	4930'	3136.89

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded back to 4900' and dumped 5 sacks of cement.
Set 20' rock bridge at 260'. Plugged well with 6 yards of ready mix cement.

RECEIVED
STATE CORPORATION COMMISSION
SEP 3 1971
CONSERVATION DIVISION
Wichita, Kansas

9-3-71

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor PIPE PULLERS, INC.
Address Box 486, Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF BARTON, SS.
Evelyn Roth (employee of owner) or (~~owner or operator~~) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 30th day of August, 1971

George A. Meyer Notary Public.

My commission expires Feb. 10, 1975

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


15-097-10137-0000
COPY

Company- THE OHIO OIL CO.
Farm Mollie Greenwood No. 4

SEC. 27 T. 29 R.18W
C SW SW

Total Depth. 4934
Comm. 1-24-57
Shot or Treated. 250 gal 7 1/2% MCA acid.
Contractor.
Issued. 6-29-57

County Kiowa
KANSAS



CASING:
10 3/4 @ 409'
7 in. @ 4930'

Elevation. 2177 RB

Production. 90 BOPD, NW
24,903 CFGPD

Figures Indicate Bottom of Formations.

No record	645
red bed	1250
shale	1475
shale & shells	1860
red shale	2000
anhydrite & shale	2376
anhydrite	2606
lime & shale	3019
lime	3103
shale & lime	3153
chalk, lime & shale	3210
lime	3965
shale & lime	4382
lime	4438
lime & shale	4527
lime	4655
lime & shale	4766
lime & sand	4775
lime & shale	4895
shale	4901
chert & lime	4934
Total Depth	
TOPS:	
Heebner	4099
Lansing-KC	4290
Mississippi chert	4901

RECEIVED
STATE CORPORATION COMMISSION
JUL 29 1971
CONSERVATION DIVISION
Wichita, Kansas