

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Kiowa County, Sec. 32 Twp. 29 Rge. 18 (E) (W)

Location as "NE/CNW/SW" or footage from lines C SW SW
Lease Owner Misco Supply Company
Lease Name Parkin "A" Well No. 1
Office Address 257 N. Broadway, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed _____ 19____
Application for plugging filed July 28 1971
Application for plugging approved _____ 19____
Plugging commenced August 14 1971
Plugging completed August 21 1971
Reason for abandonment of well or producing formation depleted

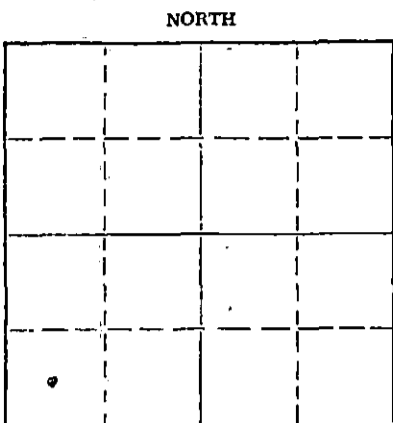

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5020 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	457'	8 5/8"	457'	none
		0	5020'	5 1/2"	5020'	2927.69

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded back to 4050' and dumped 5 sacks of cement.

Set 20' rock bridge at 260'. Plugged well with 4 yards of ready mix cement.

RECEIVED
STATE CORPORATION COMMISSION
SEP 15 1971
CONSERVATION DIVISION
Wichita, Kansas

9-15-71

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor PIPE PULLERS, INC.
Address Box 486, Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF BARTON, SS.
Evelyn Roth (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of September, 19 71

My commission expires Feb. 10, 1975

George A Meyer
Notary Public.

15-097-10125-0000

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPY

Company- NORTHERN NATURAL GAS
Farm- Parkin "A" No. 1

SEC. 32 T. 29 R. 18W
C SW SW

Total Depth. 5020'
Comm. 8-8-57 Comp. 8-31-57
Shot or Treated.
Contractor. Gabbert-Jones Drlg.
Issued. 9-20-58

County Kiowa
KANSAS



CASING:
8 5/8" 457' cem w/300 sx.
5 1/2" 5020' cem w/125 sx.

Elevation. 2197'

Production. 15 BOPD

Figures Indicate Bottom of Formations.

sand & clay	45
shale & shells	457
shale	540
Anhydrite	567
shale & shells	1125
Anhydrite	1170
shale & shells	2390
sandy shale & lime	2485
lime	2830
lime & shale	3930
lime	3065
lime & shale	4315
lime	5020
Total Depth	

TOPS: SCOUT	
Heebner	4104
Toronto	4119
Brown Lime	4285
Lansing	4297
Base Kansas City	4712
Marmaton	4730
Cherokee	4830
Mississippi	4912

RECEIVED
STATE CORPORATION COMMISSION
JUL 29 1971
CONSERVATION DIVISION
Wichita, Kansas