

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Kiowa County. Sec. 4 Twp. 29 Rge. (E) 18 (W)

Location as "NE/CNW/SW" or footage from lines C NW SE

Lease Owner Aylward Drilling Company

Lease Name Koehn Well No. 1

Office Address 813 1st Nat'l Bank Bldg. - Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed June 27 1962

Application for plugging filed July 31 1962

Application for plugging approved August 1 1962


Plugging commenced August 20 1962

Plugging completed August 23 1962

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

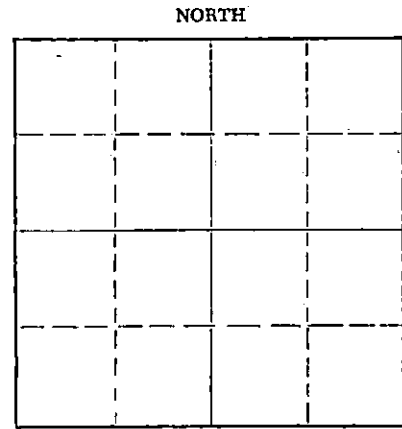

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Bill Lackamp

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5002 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	250'	None
				4 1/2"	3660'	2990'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pumped in 20 gal. of sand, checked sand to 3585' and dumped 5 sacks of cement @ 3585'. Pulled 4 1/2" casing. Checked fluid to 250', set rock bridge to 240' and dumped 20 sacks cement. Mudded to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION

SEP 21 1962

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Knight Casing Pulling Company

Address Chase, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.

Charles D. Williams (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Charles D. Williams

813 1st Nat'l Bank Bldg., Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 11th day of September, 1962

My commission expires December 11, 1965

Duane Jessup
DUANE JESSUP Notary Public.



