

15-097-20302-0000


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027  
Wichita, Kansas 67217  
NORTH



Locate well correctly on above  
Section Plat

Kiowa County, Sec. 28, Twp. 29S, Rge. (E) 17 (W)  
Location as "NE/CNW/SE/SW" or footage from lines 620' ENL & 570' EEL NE-NE  
Lease Owner C. I. S. Company  
Lease Name Anchor "D" Well No. 4  
Office Address 1304 Philtower Bldg. Tulsa, Oklahoma 74103  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed June 26, 1975  
Application for plugging filed June 26, 1975  
Application for plugging approved June 26, 1975  
Plugging commenced June 26, 1975  
Plugging completed Jun 26, 1975  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well George Russell Biberstein of Attica)  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4860 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface Casing	0	361	10 3/4"	361	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Heavy mud from total depth to 330'  
35 sacks cement - mud to 40' 15 sacks  
cement to base of cellar - 2 sacks in  
rat hole - job completed at 12:00 noon  
by Allied Cementing Company

RECEIVED  
STATE CORPORATION COMMISSION

JUL 1 1975

CONSERVATION DIVISION

9-1-1975

Name of Plugging Contractor Allied Cementing Co.  
Address Box 31 - Russell, Kansas


STATE OF Kansas COUNTY OF Sedgwick, ss.

M. A. Dressen (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. A. Dressen  
P. O. Box 18148 - Wichita, Kansas 67218  
(Address)

Subscribed and sworn to before me this 27th day of June, 1975

Virginia S. Fabian  
Virginia S. Fabian  
Notary Public.



DRILLERS LOG

ANCHOR "D" #4

<u>CASING RECORD</u>	OPERATOR: C. J. S. Company	<u>DESCRIPTION</u>
10 3/4" set at 361' with 250 sacks cement	CONTRACTOR: Search Drilling Company	620 FNL-570 FEL NE NE Section 28-29S-17W
TOTAL DEPTH;	COMMENCED: June 13, 1975	Kiowa County, Kansas
	COMPLETED: June	

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Gravel and Shale	0	50	
Shale	50	362	
Shale	362	450	
Shale	450	1020	
Anhydrite	1020	1033	
Redbed- Shale - Salt	1033	1575	
Shel	1575	1890	
Lime and Shale	1890	2175	
Lime	2175	2265	
Shale and Lime	2265	2465	
Shale and Lime	2465	2700	
Shale and Lime	2700	2845	
Shale and Lime	2845	2945	
Lime and Shale	2945	2975	
Shale and Lime	2975	3135	
Shale and Lime	3135	3250	
Lime	3250	3368	
Lime	3368	3412	
Lime	3412	3558	
Lime and Shale	3558	3758	
Lime and Shale	3758	3964	
Lime and Shale	3964	4080	
Lime and Shale	4080	4170	
Lime and Shale	4170	4284	
Lime and Shale	4284	4425	
Lime and Shale	4425	4520	
Chert- Lime	4520	4594	
Lime	4594	4666	
Lime	4666	4693	
Marmaton Lime Chert	4693	4725	
Lime	4725	4772	
Lime	4772	4812	
Conglomerate	4812	4820	
Lime and Shale	4820	4836	
Mississippi	4836	4840	
Mississippi	4840	4860	D & A


RECEIVED  
STATE CORPORATION COMMISSION  
JUL 1 1975  
CONSERVATION DIVISION  
Topeka, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge and belief.

SEARCH DRILLING COMPANY

*M. A. Dressen*  
M. A. Dressen

Subscribed and sworn to before me this 25th. day of June, 1975

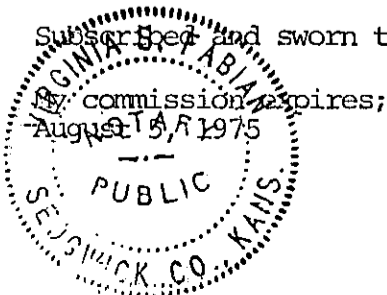

*Virginia S. Fabian*  
Virginia S. Fabian Notary Public