


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kiowa County, Sec. 28 Twp. 29S Rge. 17W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C. w/2 NE

Lease Owner Davies & Co., Inc.
Lease Name S. B. Jantz #1-28 Well No. _____
Office Address 4501 E. 31st, Suite 101, Tulsa, Ok. 74135
Character of Well (Completed as Oil, Gas or Dry Hole) _____

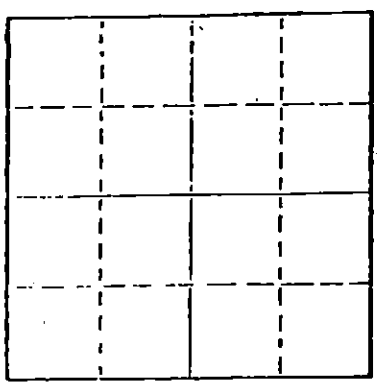

Date Well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 1/23/81 _____ 19____
Plugging completed 1/26/81 _____ 19____
Reason for abandonment of well or producing formation
Depleted

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Morris Leslie
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4810
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	425	None
				5-1/2"	4810	2123'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Bottom perforation 4772-4798. Sand to 4750 and 5 sacks cement. Top perforation 2896-2902. Squeezed 5 1/2" casing with 50 sacks cement. Pumped plug to 2500. Made shot at 2110. Pulled total of 67 joints. Squeezed hole with 10 sacks gel, 6 sacks hulls and 10 sacks gel. Released plug and displaced with 125 sacks 50/50 pos 4% gel and 3% cc. Plugging complete.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF Kansas COUNTY OF Rice
R. Darrell Kelso (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 28th day of January, 1981

My commission expires _____



Joan Kelso
Notary Public.

February 26, 1973

DRILLERS LOG

Re: S. B. Jantz #1
Cen. W/2 NE/4
Sec. 28-29S-17W
Kiowa County, Kansas

OPERATOR: Davies & Fitzgerald
CONTRACTOR: B & B Drilling, Inc.
COMMENCED: February 13, 1973
COMPLETED: February 25, 1973

0	110	Surface soil
110	428	Clay Sand & Shale
428	1280	Sand & Shale
1280	2147	Shale
2147	2762	Lime
2762	2920	Lime
2920	3350	Lime
3350	3784	Lime & Shale
4285	4810	Lime
4810		RTD

8 5/8" @ 424' w/150 sx. Lite & 150 sx. Com.

DST #1 2880-2920
DST #2 3310-3350

DST #3 4760-4810

5 1/2" @ 4809' w/200 sx.

We certify the above and foregoing to be true and correct copy of the log on the #1 S. B. Jantz, located in Kiowa County, Kansas.

B & B DRILLING, INC.

Bill Lahar
Bill Lahar, President

Subscribed and sworn to before me this 26th day of February, 1973.

Betty M. Maloney
Betty M. Maloney, Notary Public

My commission expires 1-29-77

