

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-097-21,082-0000

LEASE NAME McDermet

WELL NUMBER 1

SPOT LOCATION C NE NE

SEC. 18 TWP. 29 RGE. 20 (X) or (W)

COUNTY Kiowa

Date Well Completed 12-12-84

Plugging Commenced 12-12-84

Plugging Completed 12-12-84

TYPE OR PRINT

NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR Chapman Energy, Inc.

ADDRESS 120 South Market Suite 320 Wichita, KS. 67202

PHONE # (316) 262-1191 OPERATORS LICENSE NO. 9869

Character of Well D&A
(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? yes

Which KCC/KDHE Joint Office did you notify? Dodge City, Kansas

Is ACO-1 filed? yes If not, is well log attached? _____

Producing formation _____ Depth to top _____ bottom _____ T.D. 5275

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS _____ CASING RECORD 857' 2600'

Formation	Content	From	To	Size	Put in	Pulled out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used state, the character of same and depth placed, from feet to feet each set. Plugged well with 125 sxs 60/40 poz, 3%cc as follows: 1350' - 50 sxs; 630' - 40 sxs; 40' - 10 sxs; rathole - 10 sxs; mousehole - 10 sxs; water well - 5 sxs. Job by Halliburton, ticket #994958. Complete at 8:45pm on December 12, 1984.

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Wheatstate Oilfield Services, Inc. License No. 5149
Address P.O. Box 329 Pratt, Kansas 67124

STATE OF KANSAS COUNTY OF PRATT, ss.

Arnie Little (employee of operator) or (operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) Arnie Little Conservation Division, Wichita, Kansas


(Address) P.O. Box 329 Pratt, KS. 67124



SUBSCRIBED AND SWORN TO before me this 26 day of Dec., 1984

Mary L. Tjaden
Notary Public

My Commission expires: 3/22/88

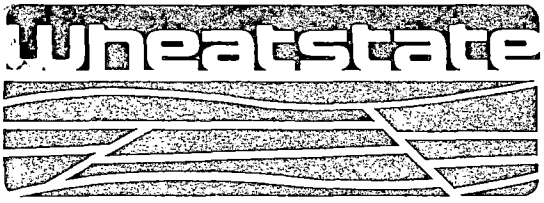

Oilfield Services, Inc.

- Rotary Drilling
- Drilling Mud and Chemicals
- Heavy Oil Field Hauling
- Roustabout and Dirt Services
- Well Completion and Servicing Units


DRILLERS' WELL LOG


McDermet #1
 C NE NE Sec. 18-29-20W
 Kiowa County, Kansas
 Commenced : 12-2-84
 Completed : 12-12-84
 API #15-097-21,082
 Operator : Chapman Energy, Inc.


DEPTH		FORMATION	REMARKS
From	To		
0	45	Sand	Ran 14 joints (590') 20#, 8 5/8" surface casing. Set at 600' with 225 sxs Class A, 3%cc, 8% gel, 100 sxs Class A, 3%cc, 2% gel. Job by Halliburton, ticket #994796. Cement did circulate. Plug down at 1:45 am on December 3, 1984. RTD 5275' Plugged well with 125 sxs 60/40 poz, 3%cc as follows: 1350' - 50 sxs; 630' - 40 sxs; 40' - 10 sxs; rathole 10 sxs; mousehole - 10 sxs; water well - 5 sxs. Job by Halliburton, ticket #994958. Complete at 8:45pm on December 12, 1984. State Plugger was out of the Dodge City, Kansas office.
45	925	Sand, Red Bed	
925	1920	Shale	
1920	5275	Lime, Shale, T.D.	

STATE OF KANSAS)
) ss
 COUNTY OF PRATT)

I, the undersigned, being duly sworn on oath, state that the above Drillers' Log is true and correct to the best of my knowledge and belief and according to the records of this office.

WHEATSTATE OILFIELD SERVICES, INC.

 ARNIE LITTLE, Vice-President




 Notary Public, Mary Tjaden
 RECEIVED
 STATE CORPORATION COMMISSION
 APR 04 1985

My Commission Expires:
3/22/88

CONSERVATION DIVISION
 Wichita, Kansas