

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-097-21,192-000

LEASE NAME Gobin "C"

WELL NUMBER 1

SPOT LOCATION E/2 NW NW

SEC. 13 TWP. 29S RGE. 18W ~~XXXXX(W)~~

COUNTY Kiowa

Date Well Completed 11-2-85

Plugging Commenced 11-2-85

Plugging Completed 11-3-85

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR Petroleum Inc.

ADDRESS 300 W. Douglas, Suite 800, Wichita, KS 67202

PHONE # (316) 793-8471 OPERATORS LICENSE NO. 5238

Character of Well D & A
(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? yes

Which KCC/KDHE Joint Office did you notify? Dodge City

Is ACO-1 filed? No If not, is well log attached? Yes

Producing formation _____ Depth to top _____ bottom T.D. 4995

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
				8 5/8	621'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used state, the character of same and depth placed, from feet to feet each set.

1st plug @ 1160' w/ 50 sx, 2nd plug @ 650' w/ 50 sx, bridge plug @ 40' w/ 10 sx, rathole 15 sx; 125 sx 60/40 poz, 6% gel, plug down @ 1:30 a.m. 11-3-85.

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Mustang Drilling & Exploration, Inc. License No. 5652

Address P.O. Box 1609, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.


Milford Martin

(employee of operator) or

(operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) Milford Martin

(Address) P.O. Box 1609, Great Bend, KS 67530



SUBSCRIBED AND SWORN TO before me this 4th day of November, 19 85

RECEIVED
STATE CORPORATION COMMISSION
P. Walters
Notary Public

Pamela K. Walters

My Commission expires: August 25, 1985

NOV 20 1985

11-20-1985

CONSERVATION DIVISION

Form CP-4
Revised 01-84

Office Phone
(316) 792-7323

Mobile Phone
792-1067


MUSTANG DRILLING & EXPLORATION, INC.

P.O. Box 1609
Great Bend, Kansas 67530

Petroleum Inc.
Gobin C-1
Kiowa County, KS

DRILLERS LOG

Shale, Sand	0	590
Shale	590	975
Shale, Red Bed	975	1815
Shale, Lime	1815	2360
Lime, Shale	2360	3050
Shale, Lime	3050	3255
Lime, Shale	3255	4625
Lime	4625	4720
Lime, Shale	4720	4906
Lime	4906	4995
RTD		4995

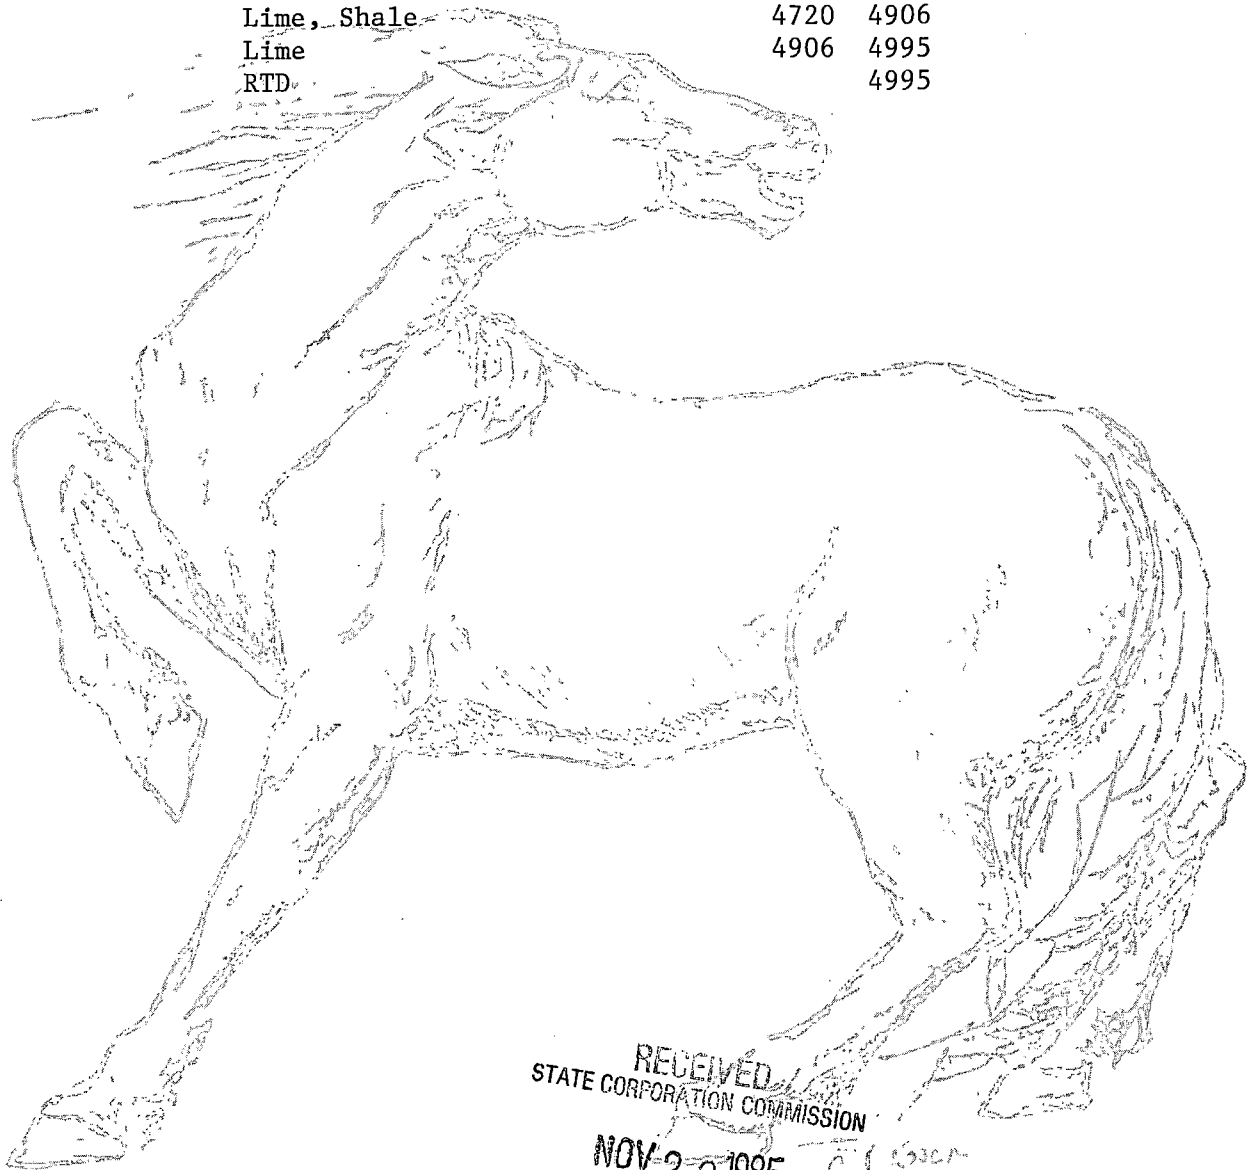

RECEIVED
STATE CORPORATION COMMISSION

NOV 20 1985

CONSERVATION DIVISION