


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

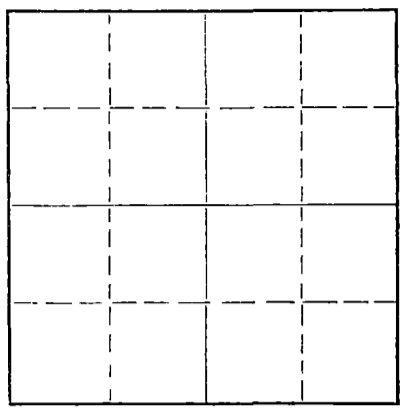

Locate well correctly on above
Section Plat

Kiowa County. Sec. 13 Twp. 29 Rge. (E) 18 (W)
Location as "NE/CNW/SW" or footage from lines SW SW
Lease Owner Imperial Oil of Kansas, Inc.
Lease Name Wilson Well No. 1
Office Address 903 Union National Bldg. Wichita 2, Kansas.
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed May 31st 19 57
Application for plugging filed May 29th 19 57
Application for plugging approved May 29th 19 57
Plugging commenced 10 A. M. May 30th 19 57
Plugging completed May 30th 19 57
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5040 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	601'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary drilling mud 350' Set plug with 20 sacks cement thru drill pipe, filled hole to 40' of botton of cellar set plug with 10 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
JUN 5 1957
CONSERVATION DIVISION
WICHITA, KANSAS
6-8-1957

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Patton Drilling Company, Inc.
Address 505 Orpheum Bldg. Wichita 2, Kansas.

STATE OF Kansas, COUNTY OF sedgwick, ss.
Robert W. Patton (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert W. Patton
505 Orpheum Bldg. Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of June, 19 57
T. P. Hendrick
Notary Public.

My commission expires Oct. 4th 1960

PLUGGING
FILE SEC 13 T. 29 R. 18W
BOOK PAGE 17 LINE 9

Imperial Oil of Kansas, Inc.

Wilson Well #1

Total Depth

Comm.

Comp.

Contractor Patton Drilling Co., Inc.

Location SW $\frac{1}{4}$ SW $\frac{1}{4}$ Sec. 13-T29S-R18W

Kiowa County, Kansas.

CASING RECORD

601' 8 5/8" Casing cemented with

400 Sack Cement

Surface Clay	85
Sand	140
Shale & Shells	160
Sand & Shells	220
Shale & Shells	400
Red Bed	600
Anhydrite & Shale	620
Red Bed & Shells	980
Shale Shells	1130
Shale, Shells & Red Bed	1530
Shale & Shells	1785
Shale & Lime	2230
Lime	2540
Lime & Shale	2590
Lime	2975
Lime & Shale	3780
Sandy Lime & Shale	3845
Lime & Shale	3910
Lime & Shale	3940
Lime	4271
Lime & Shale	4282
K. C. Lime	4300
Lime	4805
Lime & Shale	4895
Lime Sand	4900
Sand, Lime & Shale	4907
Cherty Lime	4990
Lime	5015
Cherty Lime	5023
Lime	5040
Total Depth	5040

10' off Kelly bushing to ground level.

STATE OF Kansas COUNTY OF Sedgwick ss,

I, the undersigned, being duly sworn, on oath state the above statement and log is a true and correct record and log of the well drilled at the location above described.

PATTON DRILLING COMPANY, INC.

By Robert W. Patton

Subscribed and sworn to before me this 3rd day of June 1957

T. P. Hendrick
T. P. Hendrick Notary Public

My Commission expires Oct. 4th 1960

RECEIVED
STATE CORPORATION COMMISSION

PLUGGING
SEC 13 T 29 R 18W
BOOK PAGE 17 LINE 9

JUN 5 1957

CONF. RECORD