

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

097

API NUMBER 15-017-21.056-0000

LEASE NAME Robbins Unit

WELL NUMBER #1

SPOT LOCATION C SW NW-SW

SEC. 10 TWP. 29 RGE. 16 (X) or (W)

COUNTY Kiowa

Date Well Completed 08/23/84

Plugging Commenced 08/23/84

Plugging Completed 08/24/84

LEASE OPERATOR Pan Western Energy Corporation

ADDRESS 324 S. Main, Suite 711 Tulsa, OK 74103

PHONE # (918) 582-4957 OPERATORS LICENSE NO. 7771

Character of Well D&A
(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? Yes

Which KCC/KDHE Joint Office did you notify? State Pluggger: Paul Luthi Pratt, KS

Is ACO-1 filed? NO If not, Is well log attached? NO

Producing formation N/A Depth to top _____ bottom _____ T.D. 4725'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
	Surface Casing	0	430'	8.5/8"	yes	no

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used state, the character of same and depth placed, from feet to feet each set.

1st Plug @ 950' w/50sx
2nd Plug @ 480' w/50sx (All cement 60/40 poz. 6% gel. 3%cc.)
3rd Plug @ 40' w/10sx
15sx in Rathole

(If additional description is necessary, use BACK of this form.)


Name of Plugging Contractor Halliburton License No. 5287
Address 202 West First Street, Wichita, KS 67202

RECEIVED
STATE CORPORATION COMMISSION

STATE OF Kansas COUNTY OF Sedgwick, ss.

James C. Remsberg, Slawson Drilling Company, Inc. (employee of operator) or (operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

SEP 26 1984
9-26-1984
STATE CORPORATION COMMISSION
Wichita, Kansas



(Signature) James C. Remsberg

(Address) James C. Remsberg
200 Douglas Bldg Wichita, KS

SUBSCRIBED AND SWORN TO before me this 20 day of Sept, 1984

Rebecca Wold
Notary Public

My Commission expires: 10-20-85

DRILLERS LOG

OPERATOR: Pan Western Energy Corporation
324 S. Main, Suite 711
Tulsa, Oklahoma 74103

LEASE NAME: Robbins Unit #1
C SW NW SW Sec. 10-29S-16W
Kiowa County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
200 Douglas Bldg.
Wichita, Kansas 67202

RTD: 4725'


SURFACE CASING: 8 5/8" set at 430' with 325 sx cement

0' to 498' 12 1/4" Surface Hole
498' to 1392' Red Bed & Sand
1392' to 3940' Lime & Shale
3940' to 4560' Kansas City
4560' to 4725' Mississippi
4725' RTD


STATE OF KANSAS


COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc., hereby state the above is an accurate copy of the drillers log for the Robbins Unit #1 for Pan Western Energy Corporation.

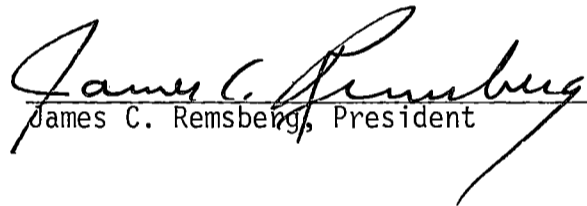
James C. Remsberg, President

Subscribed and sworn to me this
17th day of September, 1984


Rebecca Wold, Notary



My commission expires:

RECEIVED
STATE CORPORATIONS COMMISSION

SEP 26 1984

CLERK OF COURTS
WICHITA, KANSAS

