

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Building  
Wichita, Kansas 67202

WELL PLUGGING RECORD  
K.A.R.-82-3-117

API NUMBER 15-151-21,106-00-00

LEASE NAME Fincham #1

TYPE OR PRINT

WELL NUMBER 1

NOTICE: Fill out completely  
and return to Cons. Div.  
office within 30 days.

510' Ft. from S Section Line

500' Ft. from E Section Line

LEASE OPERATOR P. G. & E. Resources

SEC. 10 TWP. 29s RGE. 13W (E) or (W)

ADDRESS 6688 N. Central Expwy, Suite 1000, Dallas, TX

COUNTY Pratt

PHONE# (214) 706-3640 OPERATORS LICENSE NO. 30323 <sup>75206</sup>

Date Well Completed \_\_\_\_\_

Character of Well oil

Plugging Commenced 6-28-93

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Plugging Completed 7-21-93

The plugging proposal was approved on \_\_\_\_\_ (date)

by Duane Rankin (KCC District Agent's Name).

Is ACO-1 filed? \_\_\_\_\_ If not, is well log attached? \_\_\_\_\_

Producing Formation \_\_\_\_\_ Depth to Top \_\_\_\_\_ Bottom \_\_\_\_\_ T.D. 4760'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out
				8 5/8	566'	None
				5 1/2	4759'	2500'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet each set. Sanded bottom to 4557' & 5 sks cement. Shot at 3209', 2949', 2700', 2500' worked & pulled pipe. Plugged surface with 50 sks cement w/300# hulls, 10% gel. 100 sks cement w/100# hulls 10% gel. 8 5/8 plug. 60/40 pos 6% gel.

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor KELSO CASING PULLING, INC. License No. 6050

Address P.O. Box 347 Chase, Kansas 67524

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: K & K Oil

STATE OF Kansas COUNTY OF Rice, ss.

R. Darrell Kelso

(Employee of Operator) or (Operator) of

above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) [Signature]

(Address) P.O. Box 347 Chase, KS. 67524

SUBSCRIBED AND SWORN TO before me this 23rd day of July, 1993

[Signature]  
Notary Public

My Commission Expires: \_\_\_\_\_



RECEIVED  
STATE CORPORATION COMMISSION  
JUL 26 1993  
7-26-1993  
CONSERVATION DIVISION  
Wichita, Kansas  
Form CP  
Revised 05-88

50553 3  
**Schlumberger**

**SIMULTANEOUS  
 DUAL LATEROLOG**

COUNTY PRATT  
 FIELD SWISHER  
 LOCATION 10-29S-13W  
 WELL D. FINCHAM #1  
 COMPANY SOHIO PETROLEUM CO.

COMPANY SOHIO PETROLEUM COMPANY

WELL D. FINCHAM #1 API PFS

FIELD SWISHER 15-151-21,106

COUNTY PRATT STATE KANSAS

LOCATION	500 FEL. & 510 FSL		
API SERIAL NO	SEC.	TWP	RANGE
	10	29S	13W


Other Services:  
 FDC/CNL./GR  
 CYBERLOOK

Permanent Datum: GROUND LEVEL; Elev.: 1918  
 Log Measured From KB 7 Ft. Above Perm. Datum  
 Drilling Measured From KB

Elev.: K.B. 1925  
 D.F. ---  
 G.L. 1918

Date	4-10-82						
Run No.	ONE						
Depth-Driller	4760						
Depth-Logger (Schl.)	4761						
Btm. Log Interval	4747						
Top Log Interval	565						
Casing-Driller	8 5/8 @ 564		@	@	@	@	@
Casing-Logger	565						
Bit Size	7 7/8						
Type Fluid in Hole	STARCH						
Dens.	Visc.	9.3		46			
pH	Fluid Loss	7.0		15.2ml		ml	ml
Source of Sample	FLOWLINE						
Rm @ Meas. Temp.	.29	@ 81 °F	@	°F	@	°F	@
Rmf @ Meas. Temp.	.19	@ 70 °F	@	°F	@	°F	@
Rmc @ Meas. Temp.	.44	@ 81 °F	@	°F	@	°F	@
Source: Rmf   Rmc	PRESS	CALC					
Rm @ BHT	.21	@ 113°F	@	°F	@	°F	@
TIME	Circulation Stopped	12:30		STATE CORPORATION COMMISSION			
	Logger on Bottom	16:00		JUN 7 1993			
	Max. Rec. Temp.	113°F		°F			
Equip.	Location	8351	WICH	CONSERVATION DIVISION Wichita, Kansas			
Recorded By	BAUER						
Witnessed By	HOLKE						

R 13 W

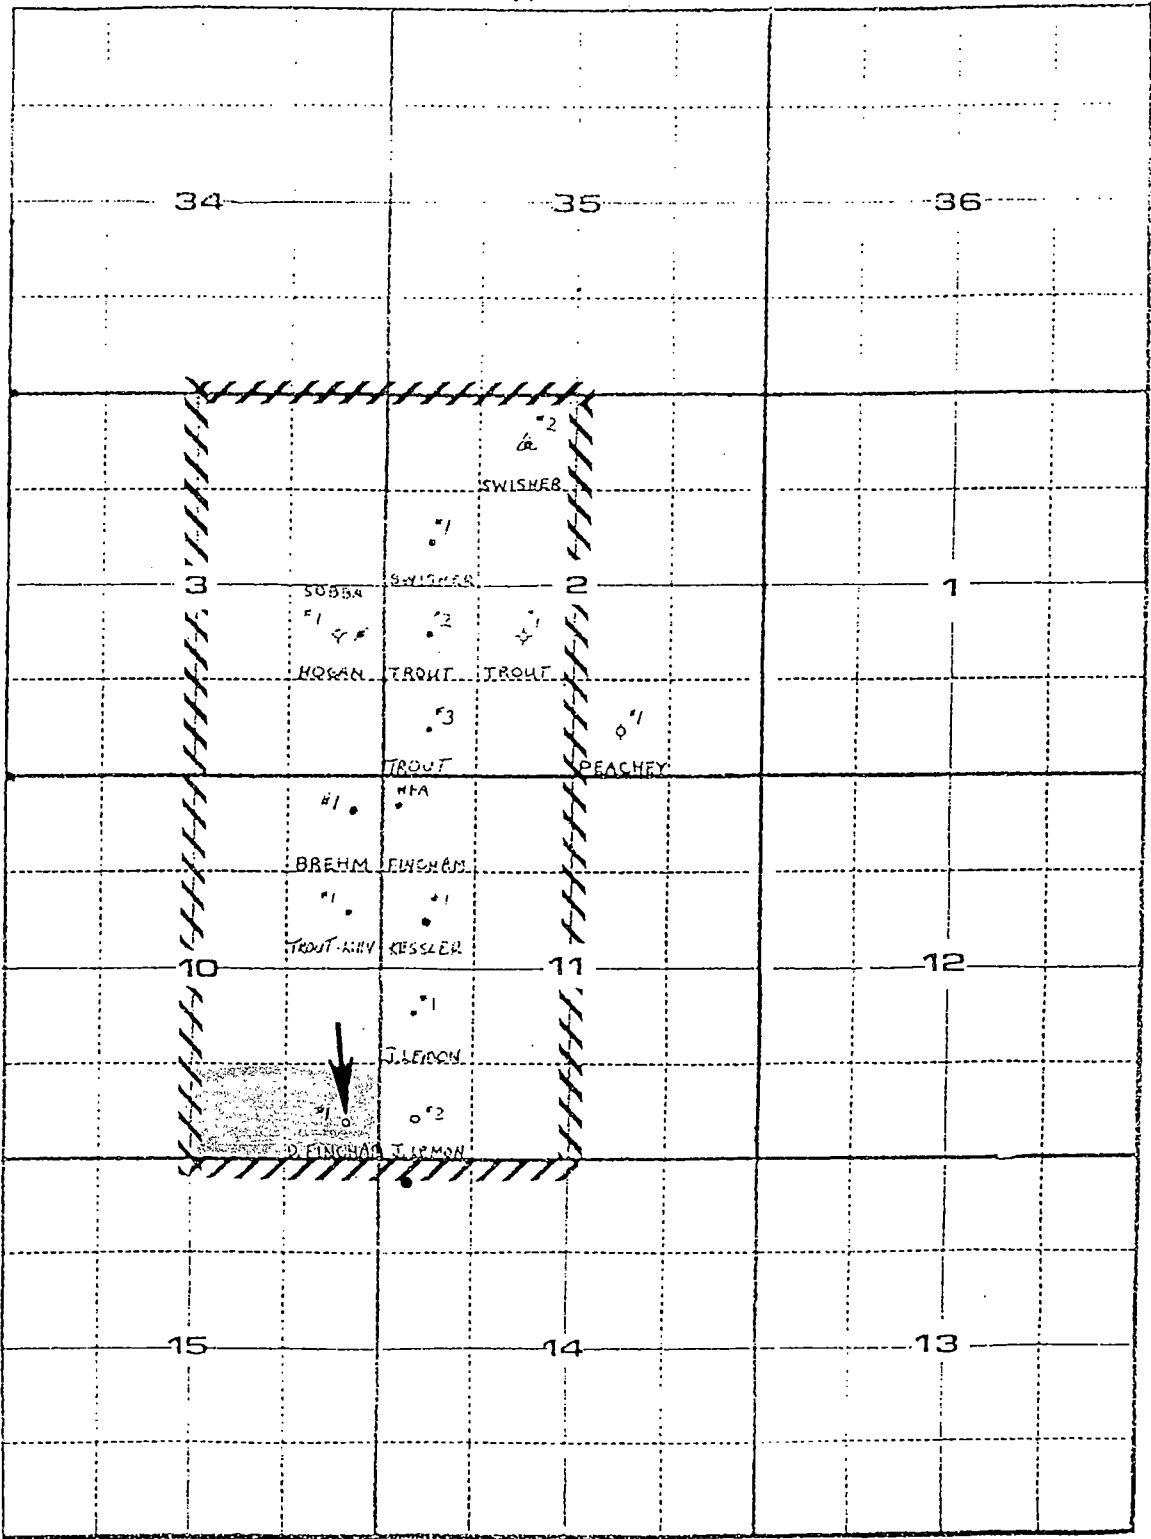

2" = 1 MILE

SWISHER-SIMPSON SPACED AREA

Original Signed By  
**W. H. WARD**, District Superintendent of  
 the Casper District of Sohio Petroleum Company  
 do certify the above to be true and correct  
 to the best of my knowledge.

Date 2-17-82

APRIL  
30 @ 86 2580

Sohio Petroleum Company  
 Assigned Acreage Plat  
 D. Fincham #1  
 510' FSL & 500' FEL  
 Sec. 10, T29S, R13W  
 Swisher Field  
 Pratt County, Kansas

MA 4  
31 @ 86  
2666

7836 86 6924 23849 102913