15-151-00001-00-01


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

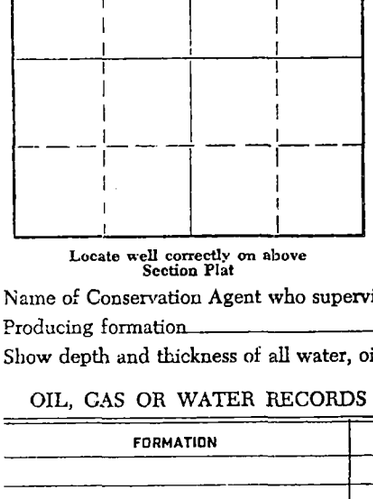

Locate well correctly on above Section Plat

Pratt County. Sec. 25 Twp. 28 Rge. 15 (E) (W)

Location as "NE/CNW¼SW¼" or footage from lines SW SW SE

Lease Owner Raymond Oil Co., Inc.

Lease Name Johnson #1 Well No.

Office Address Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19

Plugging commenced 11/ 6/70 19

Plugging completed 11/17/70 19

Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein

Producing formation Depth to top Bottom Total Depth of Well 4840' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS — CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	326	none
				4½"	4560'	2399'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Ran sand to 4490' and ran 4 sacks of cement. Loaded hole, shot pipe at 3885', worked to 28", checked hole, mud came in to 2600'. Pressured up with water, pumped 45 barrels oil, displaced with water, shot pipe at 3505', 3211', 3030', 2832', 2603', 2406', worked pipe loose and pulled 74 joints. Bailed fluid down to 275' and dumped 4 yards ready mix.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
NOV 25 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.

Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.

NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight

CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of November, 19 70

Margaret Medeker
Notary Public.

My commission expires 2/15/71


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company. TWIN DRILLING, INC.
Farm- Johnson No. 1

SEC. 25 T. 28 R. 15W
SW SW SE

Total Depth. 4840'
Comm. 6-23-58 Comp. 7-8-58
Shot or Treated.
Contractor. Twin Drilling, Inc.
Issued. 9-27-58

County Pratt
KANSAS



CASING:
8 5/8" 326.64' w/175 sx. cem.

Elevation. 2045 GR

Production. Dry

Figures Indicate Bottom of Formations.

surface	49
sand	200
soft shale	260
shells and shale	300
clay and shale	320
shale and red bed	548
shale and lime shells	1552
lime-shale	2060
lime	2125
Ft. Riley lime	2288
lime	2445
shale and lime	2580
lime w/shale breaks	2808
lime-shale	3390
lime	3330
shale-lime	3607
lime	3882
lime w/shale breaks	3955
lime-shale	4075
lime	4180
Kansas City lime	4239
lime	4555
lime sand chert	4607
lime	4620
lime chert-shale	4663
lime	4692
shale and lime	4724
sand	4745
sand and shale	4787
Arbuckle	4840 RTD
Total Depth	

TOPS	
Heebner	3878
Brown lime	4035
Lansing	4050
Base Kansas City	4440
Mississippi chert	4535
Kinderhook	4550
Viola	4614
Simpson	4696
Simpson sand (scout)	4616
Arbuckle	4804

RECEIVED
STATE CORPORATION COMMISSION
NOV 5 1970
CONSERVATION DIVISION
Wichita, Kansas

2-1419