


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Ford County, Sec. 14 Twp. 29S Rge. 25W (E) (W)

Location as "NE/CNW/SW" or footage from lines SE NW
Lease Owner Thunderbird Drilling, Inc.
Lease Name McCune Well No. 1
Office Address P.O. Box 18407-Wichita, Ks. 67218
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 4/12/80 19
Application for plugging filed 4/12/80 19
Application for plugging approved 4/12/80 19
Plugging commenced 4/12/80 19
Plugging completed 4/12/80 19
Reason for abandonment of well or producing formation 4/12/80

NORTH

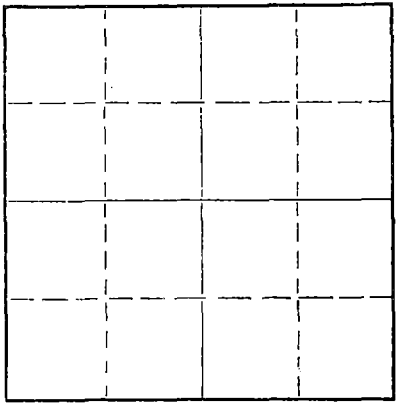

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5425 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface			8 5/8"	1098'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st plug @ 1090' w/50 sx
2nd plug @ 500' w/25 sx
3rd plug @ 40' w/10 sx

RECEIVED
STATE CORPORATION COMMISSION

MAY 9 1980

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Thunderbird Drilling, Inc.
Address P.O. Box 18407- Wichita, Ks. 67218

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Burke Krueger (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Burke Krueger

P.O. Box 18407- Wichita, Ks. 67218
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of May, 1980

My commission expires 3-25-84

Gloria DeJesus
Gloria DeJesus Notary Public.



DRILLERS LOG

Company Thunderbird Drilling, Inc.

Contractor Thunderbird Drilling, Inc

Elevation 2625' K.B.

Farm McCune

Well No. 1

Casing 8 5/8" @ 1098- w/600 sx

Location SE NW, Sec. 14-29S-25W

County Ford County, Ks.

Production

<u>From</u>	<u>To</u>	<u>Description</u>
0	300	Surface Hole
300	795	Shale & Shells & Sand
795	1098	Shale
1098	1528	Shale & Sand
1528	2560	Shale & Lime
2560	3629	Lime & Shale
3629	3720	Shale & Lime
3720	4125	Lime & Shale
4125	4260	Lime
4260	4880	Lime & Shale
4880	5080	Lime
4080	5340	Lime & Shale
4340	5425	Lime
5425	R.T.D.	

RECEIVED
STATE CORPORATION COMMISSION

MAY - 9 1980

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) ss.
COUNTY OF SEDGWICK)

I, Burke Krueger, of Thunderbird Drilling, Inc. upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from your McCune #1.

Burke Krueger

Subscribed and sworn to before me this 8th day of May, 1980

Gloria DeJesus
Gloria DeJesus Notary Public

My commission expires: 3-25-84

