


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

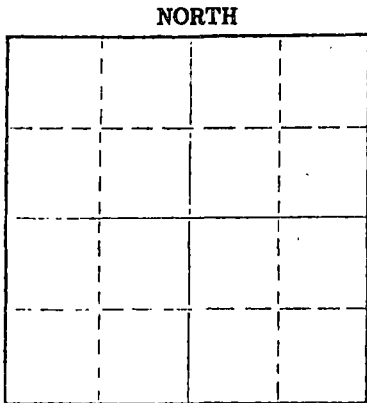

Locate well correctly on above Section Plot

Sedgwick County, Sec. 11 Twp. 27 Rge. 1W (E) (W)
Location as "NE/CNW/SW" or footage from lines. G E/2 NE NW NW
Lease Owner Drillers Production Company
Lease Name Slease #3 Well No.
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 5/4/76 19
Plugging completed 5/6/76 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Dewey
Producing formation Depth to top Bottom Total Depth of Well 3408 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	222	none
				5 1/2"	3403'	2128'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked bottom, ran sand to 2700' and dumped 5 sacks cement.
Shot pipe at 2348', 2244', 2128', pulled 57 joints of 5 1/2" casing.
Bailed hole to 230' and set 10' rock bridge, dumped 5 yards ready mix.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
MAY 21 1976

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC. CONSERVATION DIVISION
Address CHASE, KANSAS WICHITA, KANSAS

STATE OF KANSAS COUNTY OF RICE
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well.

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)

Subscribed and Sworn to before me this 18th day of May, 1976

My commission expires
NOTARY PUBLIC
MARGARET MELCHER
Rice County, Ks.
My Comm. Exp. Feb. 15, 1979


Margaret Melcher
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- The DRILLERS PRODUCTION CO.
Farm- Slease No. 3

SEC. 11 T. 27 R. 1W
NE NW NW
330' S & 165' W of the NE
corner of the NW, NW
County Sedgwick
KANSAS

Total Depth. 3414
Comm. 9-17-51 Comp. 10-17-51
Shot or Treated.
Contractor. Springer & Harper
Issued. 11-24-51



CASING:

8 5/8" 220' cem w/250 sx.
5 1/2" 3408' cem w/200 sx.

Elevation. 1327 RB

Production. I.P. 30 BOPD

Figures Indicate Bottom of Formations.

sand	35
sand, shale	168
anhydrite	280
lime, shale	475
lime	600
lime, shale	775
lime	900
lime, shale	1015
lime	1040
	1190
shale	1770
lime	2070
lime, shale	2380
shale	2438
lime, shale	2490
shale	2595
lime	3005
lime, shale	3075
shale	3084
lime Miss. & chert	3180
lime	3285
lime, shale	3335
shale	3405
sand Simpson	3410
sand	3412
sand HFW	3414
Total Depth	

Tops:
Kansas city 2597
Mississippi 3084
Simpson Sand 3401

DP Meas. 3412=3408
RTD 3408

CD 3414 HFW
EB 2753 1/2 20 § 2713-19
squeeze.
CO 2727
19 § 2706 1/2-10 1/2
PB 2712 1/2
250 Gal. Acid

RECEIVED
STATE CORPORATION COMMISSION

APR 19 1976

CONSERVATION DIVISION
Wichita, Kansas