


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

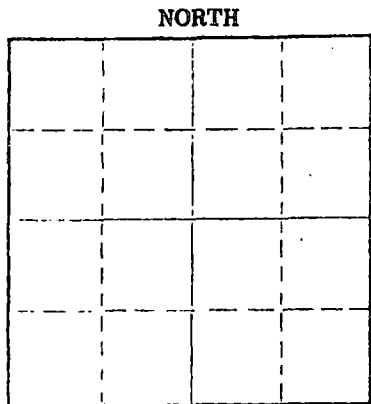

Locate well correctly on above Section Plat

Dewey County. Sec. 11 Twp. 27 Rge. 1W (E) (W)
Location as "NE/CNW/SW" or footage from lines SE NE NW
Lease Owner Drillers Production Company
Lease Name Lease #4 Well No. _____
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 4/27/76 _____ 19____
Plugging completed 5/4/76 _____ 19____
Reason for abandonment of well or producing formation depleted.
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Dewey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2717 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4	207	none
				7"	2713	1200'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked bottom, dumped 7 sacks cement on bottom. Loaded hole, shot pipe at 1296', 1190', pulled 51 joints of 7" casing. Bailed hole to 215', set 10' rock bridge and dumped 5 yards ready mix.
PLUGGING COMPLETE.
RECEIVED
STATE CORPORATION COMMISSION
MAY 21 1976

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS
5-21-76

STATE OF KANSAS COUNTY OF RICE
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)

Subscribed and Sworn to before me this 18th day of May, 1976

My commission expires _____
NOTARY PUBLIC
MARGARET WELCHER
Rice County, Ks.
My Comm. Exp. Feb. 15, 1979

Margaret Melcher
Notary Public.

WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY

603 East Murdock,


Wichita, Kansas

Company- The DRILLERS PRODUCTION COMPANY
 Farm- Slease No. 4

SEC. 11 T. 27 R. 1W
 NW NE NW

Total Depth. 2720
 Comm. 10-1-51 Comp. 11-15-51
 Shot or Treated.
 Contractor. Springer & Harper
 Issued. 1-12-52

County Sedgwick
 KANSAS



CASING:

10" 207' cem w/300 sx
 7 " 2713' cem w/200sx

Elevation. 1327 BB.

Production. Pmp 25 Bbls

Figures indicate Bottom of Formations.

sand	60
lime, shale	160
lime	215
anhydrite	230
lime, shale	995
lime	1050
shale, shells	1300
shale	1600
lime	1835
lime, shale	1880
lime	2055
lime, shale	2330
lime	2345
lime, shale	2420
shale	2597
lime	2717
lime	2720
Total Depth	2720

Tops:
 Kansas city 2597

Perf. 7/S 2716-19½
 100 Acid, 175' FIH/16 hrs
 500 Acid, 1500 Acid.

RECEIVED
 STATE CORPORATION COMMISSION

APR 19 1976

CONSERVATION DIVISION
 Wichita, Kansas