

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Kingman County, Sec. 31 Twp. 27S Rge. (E) 5 (W)

Location as "NE/CNW/SW" or footage from lines C NE NW
Lease Owner WRICO DRILLING, INC.

Lease Name Taber Well No. 1

Office Address 6631 E. Kellogg, Wichita, Kansas 67207

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed January 21 1969

Application for plugging filed Verbal Approval 19

Application for plugging approved Verbal Approval 19


Plugging commenced January 21 1969

Plugging completed January 21 1969

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

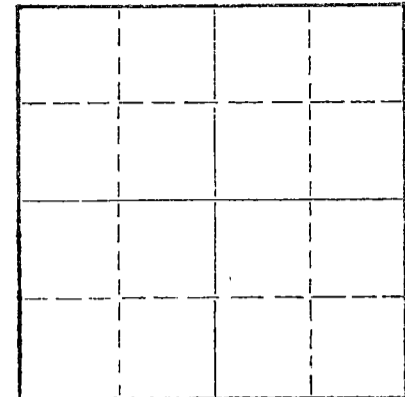

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Ralph J. Warren

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	207'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy rotary mud from 3,809 feet (rotary total depth) to 200 feet. Set bottom plug at 200 feet and cemented with 25 sacks cement. Filled hole with heavy rotary mud to 40 feet. Set plug at 40 feet and cemented with 10 sacks cement, 2 sacks cement in rathole.

RECEIVED
STATE CORPORATION COMMISSION
JAN 30 1969
CONSERVATION DIVISION
Wichita, Kansas

1-30-69

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor H-30, Inc.
Address 200 N. Main, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Merle Britting (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Merle Britting
200 N. Main, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of January, 1969

My commission expires April 21, 1971
Martha Hartpence Notary Public.

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **Wrico Drilling, Inc.**

SEC. 31 T. 27S R. 5W

FARM **Taber** NO. **1**

LOC. **C NE NW**

TOTAL DEPTH **3,809'**

COUNTY **Kingman**


COMM. **December 29, 1968** COMP. **January 21, 1969**

KANSAS

SHOT OR TREATED

CONTRACTOR **H-30, INC.**

ISSUED



CASING

20	10	
15	8	-5/8" 207' cemented w/150 sx cement ELEVATION 1445 KB
12	6	
13	5	

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Clay & Red Rock	90	<u>SAMPLE TOPS:</u>	
Red Rock & Shale	207	Topeka	2346 - 901
Shale & Shells	770	Heebner	2714 -1269
Anhydrite	805	Toronto	2725 -1280
Lime & Shale	1950	Brown Lime	2941 -1496
Shale & Lime	2338	Lansing	2972 -1527
Lime & Shale	2505	Mississippi Chert	3750 -2305
Shale & Lime	2737	Mississippi Lime	3802 -2357
Lime	3050	Rotary T.D.	3809 -2364
Lime & Shale	3104		
Lime	3650		
Lime & Shale	3725		
Lime	3760		
Chert	3805		
Lime	3809		
Rotary Total Depth	3809		

RECEIVED
 STATE CORPORATION COMMISSION
JAN 30 1969
 CONSERVATION DIVISION
 Wichita, Kansas

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

Merle Britting

 Merle Britting

STATE OF KANSAS)
 COUNTY OF SEDGWICK) SS:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 29th day of January, 1969.

Martha Hartpence

 Martha Hartpence - Notary Public

My Commission Expires:

April 21, 1971