


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit.
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

NORTH

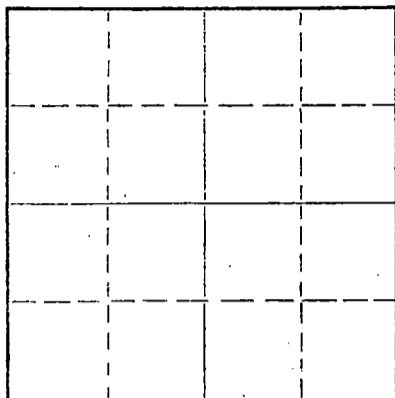

Locate well correctly on above
Section Plat

Kiowa County, Sec. 12 Twp. 29 Rge. 20 (E) (W) x
Location as "NE/CNW/SW" or footage from lines C NE SW
Lease Owner Okmar Oil Co.
Lease Name Neier Well No. #1
Office Address 1130 Vickers - KSB&T Bldg. Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 8-10-71 19
Application for plugging approved 19
Plugging commenced 9-13-71 19
Plugging completed 9-15-71 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation Depth to top Bottom Total Depth of Well 5079' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	5075'	4233.90'
				8 5/8"	856'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 5060'. Mixed and ran 5 sacks cement thru dump bailer.
Mudded hole to 380' - set 20' rock bridge. Filled hole with 6 yards ready-mix from 360' to base of cellar.


RECEIVED
STATE CORPORATION COMMISSION
SEP 17 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 16 day of September, 1971
Sidney D. Miller
Notary Public.
My commission expires October 1972



WELL LOG

COMPANY **Okmar Oil Company**
 FARM **Neier** NO. **1**
 TOTAL DEPTH **5079'**
 COMM. **8-2-71** COMP. **8-14-71**
 CONTRACTOR **Garvey Drilling Company**

SEC. **12** T. **29S** R. **20W**
 LOC. **C NE SW**
 COUNTY **Kiowa, Kansas**

CASING

8 5/8" @ 856' w/1020sx
5 1/2" @ 5075' w/ 75sx

ELEVATION

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

- 40' Surface Soil
- 290' Shale
- 1055' Red Bed & Shale
- 1790' Shale
- 2260' Lime & Shale
- 4540' Lime
- 4665' Lime & Shale
- 4770' Lime
- 4935' Lime & Shale
- 5079' Lime & Shale
- 5079' RTD

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 13 1971
 CONSERVATION DIVISION
 Wichita, Kansas

State of Kansas }
 County of Barton } SS

I, Charlene Marker of Garvey Drilling Company

upon oath state the above and foregoing is a true and correct copy of the log of the Neier No. 1 well.

Charlene Marker

Subscribed and sworn to before me this 17th day of August 1971

Notary Commission Expires: July 8, 1974

James C. [Signature]
 NOTARY PUBLIC