

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

KIOWA County. Sec. 15 Twp. 28 Rge. 16W (E) (W)

Location as "NE/CNW%SW%" or footage from lines NW NW NE

Lease Owner SANTA-FE PIPE & SUPPLY, INC.

Lease Name PYLE - HERRING Well No. 1

Office Address P.O. BOX 562, GREAT BEND, KANSAS

Character of Well (completed as Oil, Gas or Dry Hole) GAS

Date well completed OCTOBER 4 19 55

Application for plugging filed OCTOBER 1 19 65

Application for plugging approved OCTOBER 4 19 65


Plugging commenced OCTOBER 2 19 65

Plugging completed OCTOBER 9 19 65

Reason for abandonment of well or producing formation DEPLETED

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

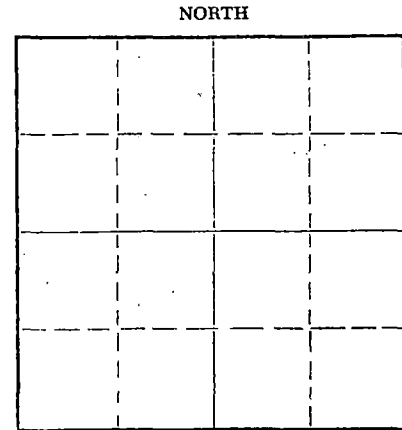

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well ARCHIE ELVING

Producing formation Depth to top Bottom Total Depth of Well 4820' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				9 5/8"	400'	NONE
				5 1/2"	4819'	4100.15'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- 4820' - 4675' - BRIDGE PLUG
- 4675' - 4625' - SAND
- 4625' - 4585' - 5 sacks CEMENT
- 4585' - 300' - MUD
- 300' - 290' - ROCK BRIDGE
- 290' - 280' - 4 SACKS CEMENT
- 280' - 220' - 24 SACKS CEMENT
- 220' - 40' - MUD
- 40' - 30' - ROCK BRIDGE
- 30' - BASE - 12 SACKS CEMENT

RECEIVED
STATE CORPORATION COMMISSION
NOV 5 1965
CONSERVATION DIVISION
Wichita, Kansas

11-5-1965


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor SANTA-FE PIPE & SUPPLY, INC.
Address P.O. BOX 562, GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
P.O. BOX 562, GREAT BEND, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 4th day of NOVEMBER, 19 65.



JULY 31, 1966
My commission expires
Notary Public.

15-097-00004-0000

WELL LOG

COMPANY - Falcon Seaboard Drilling Company

Sec. 15-28S-16W

FARM - ^{Pyle}~~Susan D.~~ Herring No. 1

Loc. C NW NW NE

County - Kiowa

TOTAL DEPTH - 4,820'

COMM. - 9-11-55. COMP. - 10-4-55.

CONTRACTOR - Company Tools

ELEVATION

CASING

D.F. - 2148

9-5/8" - 400'

Gr. - 2142

5-1/2" - 4819'

DRILLER'S LOG

Surface Soil, Gravel & Shale	0	400
Shale	400	2295
Shale & Lime	2295	4685
Chert, Lime & Shale	4685	4712
Chert	4712	4718
Lime, Shale & Chert	4718	4754
Lime & Sand	4754	4793
Sand, Lime & Shale	4793	4812
Lime & Shale	4812	4820

3
S
/sm

RECEIVED
STATE CORPORATION COMMISSION

OCT 4 1965

CONSERVATION DIVISION
Wichita, Kansas