


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD 15-097-10150-0000

NORTH

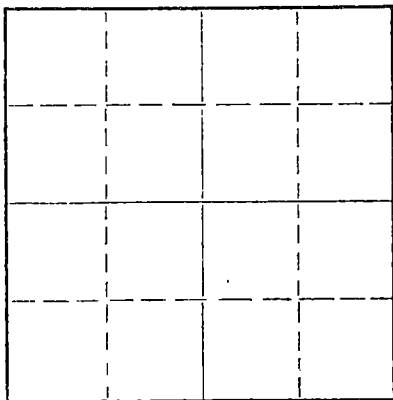

Locate well correctly on above
Section Plat

Kiowa County, Sec. 4 Twp. 28 Rge. 16 (E) (W)
Location as "NE/CNW%SW%" or footage from lines C NE NW
Lease Owner Western Oil Field Service
Lease Name Bineford Well No. 1
Office Address Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 1/23/68 19
Plugging completed 1/26/68 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Elving
Producing formation Depth to top Bottom Total Depth of Well 4707 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	250'	none
				4 1/2"	4667'	2937'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole, sanded back to 4600' and ran 4 sacks of cement.
Shot pipe at 3862', 3757', and 3651', pumped 10 barrels water.
Spotted oil, pumped 2 loads oil and chased with plug and 55 barrels water, 500 to 800 lbs. pressure. Shot pipe at 3453', 3247', 3051', 2956', worked pipe loose and pulled 91 joints. Set 10' rock bridge at 250' and ran 25 sacks of cement. Mudded hole to 40', 10' rock bridge and ran 10 sacks of cement. Tallied pipe.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
FEB 12 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF Kansas, COUNTY OF Rice, ss.
Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of January, 1968

My commission expires February 15, 1971

Margaret Melcher
Notary Public.