

15-097-10170-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

Kiowa County, Sec. 20 Twp. 28S Rge. (E) 18 (W)

Location as "NE/CNW/SW" or footage from lines NW/4 NW/4 NW/4

Lease Owner Skelly Oil Company

Lease Name F. L. Einsel Well No. 1

Office Address Box 1650, Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed November 12, 19 57

Application for plugging filed June 23, 19 60

Application for plugging approved June 13, 19 60


Plugging commenced May 28, 19 60

Plugging completed June 2, 19 60

Reason for abandonment of well or producing formation Depleted, not economical to operate

If a producing well is abandoned, date of last production April 2, 19 60

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (verbally)

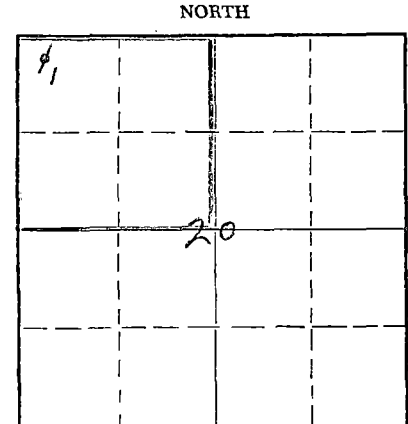

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Lackamp

Producing formation Lansing Depth to top 4245' Bottom Total Depth of Well 4958 Feet

Show depth and thickness of all water, oil and gas formations. PB 4286'

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Mississippi	Oil	4858'	4871'	8-5/8"	628'9"	None
Lansing Lime	Oil	4285'	4298'	5-1/2"	4994'0"	2562'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- 30 sacks of cement 4286' to 4046'
- Heavy mud 4046' to 610'
- Rock bridge 610' to 600'
- 20 sacks of cement 600' to 540'
- Heavy mud 540' to 40'
- Rock bridge 40' to 30'
- 15 sacks of cement 30' to 6'
- Surface soil 6' to Surface

RECEIVED
STATE CORPORATION COMMISSION

JUN 27 1960 6-27-60

CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ace Pipe Pulling Company

Address Box 304, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Reno, ss.
H. E. Wamsley (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

Box 391, Hutchinson, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 24th day of June, 19 60

My commission expires April 7, 1963

[Signature] Notary Public.