

15-097-10173-0000


28

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

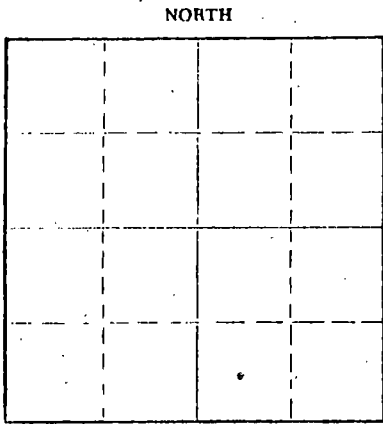

Locate well correctly on above  
Section Plat

Kiowa County, Sec. 18 Twp. 28 Rge. (E) 18 (W)  
Location as "NE/CNW&SW" or footage from lines C SW SE  
Lease Owner Santa Fe Pipe & Supply Company  
Lease Name Rice Well No. 1  
Office Address Box 562, Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed October 7 1963  
Application for plugging filed October 24 1964  
Application for plugging approved October 26 1964  
Plugging commenced October 26 1964  
Plugging completed November 5 1964  
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Archie V. Elving  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4919 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	361	8 5/8"	361'	none
		0	4919	4 1/2"	4919'	2289.74

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Pushed plug to 4275', set 10' rock bridge and dumped 3 sacks of cement.  
Pushed plug to 275', set 10' rock bridge and dumped 2 sacks of cement. Bailed hole down and dumped 25 sacks of cement.  
Filled hole with mud to 40', set 10' rock bridge and capped with 10 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION

JAN 7 1965

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Pipe Pullers, Inc.  
Address Box 486, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Dean Wells (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Wells  
Ellinwood, Kansas

SUBSCRIBED AND SWORN to before me this 6 day of November, 1964

J. Shader  
Notary Public.

My commission expires July 7, 1968

WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas


COPY  
15-097-10173-0000

Company- STATESWIDE OIL CORP.  
Farm- Rice No. 1

SEC. 18 T. 28 R. 18W  
C SW SE

Total Depth. 4920'  
Comm. 9-20-63 Comp. 10-7-63  
Shot or Treated.  
Contractor. Leben Drilling Inc.  
Issued. 2-15-64

County Rice  
KANSAS



Elevation. 2245' DF

Production. Dry

CASING:  
8 5/8" 361' cem w/225 sx.  
4 1/2" 4920' cem w/200 sx.

Figures Indicate Bottom of Formations.

sand	130
clay & shale	361
shale	450
redbed	563
Anhydrite	583
shale	1141
shale & redbed	1720
shale & lime strks.	2280
lime	2466
lime & shale	3135
shale & lime	4150
lime & shale	4290
lime	4855
lime & chat	4880
Mississippi Lime	4920 RTD
Total Depth	

TOPS: LOG	
Heebner	4080
Toronto	4094
Douglas	4103
Brown Lime	4248
Lansing	4258
Base Kansas City	4616
Reworked Mississippi	4846
Mississippi	4870